

INSTALLATION INSTRUCTION

Wall Pack Series – QSPC13LU5KBZ

WARNING

DISCONNECT POWER DURING INSTALLATION AND BEFORE SERVICING.
READ ALL INSTRUCTIONS COMPLETELY BEFORE STARTING INSTALLATION.

Fig1


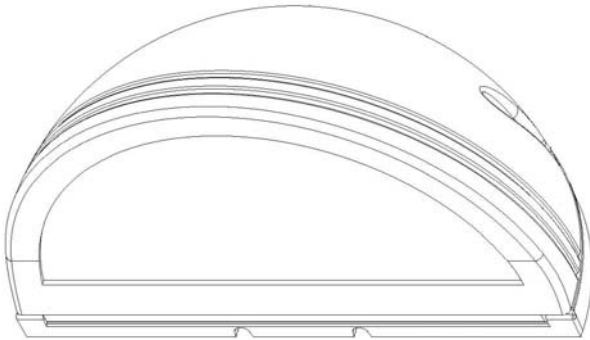


Fig2

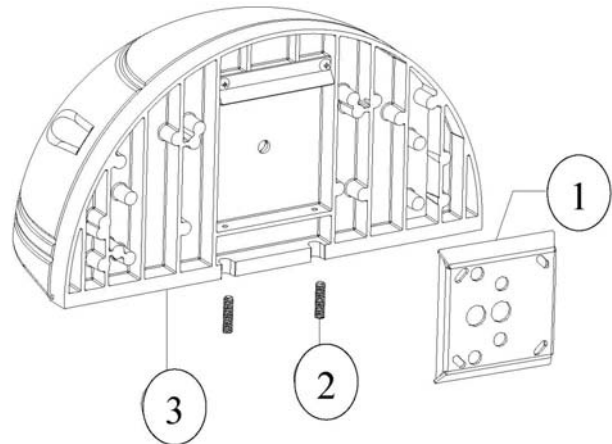

INSTALLATION

1. Install the mounting plate (1) on the junction box with screws.
2. Use approved connectors to connect fixture leads to supply leads, and make wire to be spliced inside the junction box.
3. Put the fixture on the mounting plate (1), and retaining screws (2), also use silicone around housing (3) except the bottom of the fixture.

WARNING:

1. This product contains chemicals known to the state of California to cause cancer, birth defects, and/or other reproductive harm, thoroughly wash hands after installing, handling, cleaning or otherwise touching this product
2. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved
3. Fixtures are available in 120 to 277 volt input (not for connection to a voltage above 240Vac in Canada). Please verify before wiring fixture to field wires.

IMPORTANT-to weather-proof your outdoor installation, be sure to seal all housing. (Mounting, Conduit, Plugs, Etc.) with silicone sealant.

TROUBLE SHOOTER-CHECK LIST

IF LIGHT DOES NOT WORK: Check Your Power Source.

Check Electrical Connections.

Check To Insure Proper Seating Of Lamp. Check If Lamp Burned Out.



Hubbell Lighting
701 Millennium Blvd.
Greenville, SC 29607

www.hubbell-llg.com

Outdoor Lighting

V: A

RE