



Outdoor Lighting

Architectural LED Floodlight



NEW 12 LED Architectural Floodlight & Wall Mount 6 LED

Hubbell Outdoor Lighting's ALF family has expanded and now features a 12 LED flood and wall mount 6 LED. Both 6 and 12 LED fixtures are excellent for small floodlighting applications such as signs, façade, landscape accent or small area illumination. The wall mount ALFW-6LU is a versatile solution for doorways entrances featuring an adjustable pivot from 0-75°. The ALF family's compact size allows the flood or wall mount to be easily hidden or blend into the landscape environment.



ALF 12 LED KNUCKLE MOUNT



ALFW 6 LED WALL MOUNT



ALF 6 LED KNUCKLE MOUNT

Key Features & Benefits

- ALF-6LU/ALFW-6LU – 10.7w delivering 510 lumens
- ALF-12LU – 22w delivering over 1000 lumens
- Wall mount ALFW cast aluminum cover/quick mount plate/universal adapter for easy installation
- 5000K high CRI LEDs
- Long life – 50,000 hours L70
- Wide uniform beam – 3 times set back
- Rugged, weatherproof, compact, low profile
 - Extruded aluminum housing
 - Tempered glass lens
 - Silicone gasket seal
 - Brass threads at knuckle
- Dark bronze powder coat finish
- UL1598 listed for use in wet locations

ALF DESIGN FEATURES



Tempered, silk screened glass lens, 6 & 12 LED



Decorative, ribbed back for sleek heat dissipation



Wide beam LED reflector



Weathertight end caps and gasket



Rugged knuckle with locking teeth and brass threads



Wall mount fits 3 1/2" or 4" standard junction boxes

ORDERING INFORMATION ON REVERSE SIDE

ALF Architectural LED Floodlight Application

Before



After ALF-6LU-5K-BZ






ORDERING INFORMATION



| Catalog Number | Wattage | Number of LEDs | Voltage ¹ | Lumens | Life | CCT | Weight lbs. (kg) |
|---------------------------|---------|----------------|----------------------|--------|------------|-------|------------------|
| 1/2" KNUCKLE MOUNT | | | | | | | |
| ALF-6LU-5K-BZ | 10.7 | 6 | 120-277V | 510 | 50,000 hrs | 5000K | 4.0 (1.8) |
| ALF-12LU-5K-BZ | 22 | 12 | 120-277V | 1000 | 50,000 hrs | 5000K | 8.0 (3.6) |
| WALLMOUNT | | | | | | | |
| ALFW-6LU-5K-BZ | 10.7 | 6 | 120-277V | 510 | 50,000 hrs | 5000K | 4.5 (2.0) |
| ALFW-6LU-5K-BZ-PC | 10.7 | 6 | 120V | 510 | 50,000 hrs | 5000K | 4.5 (2.0) |

¹ Unit should not be used above 240V in Canada

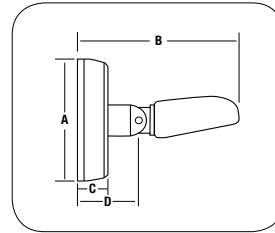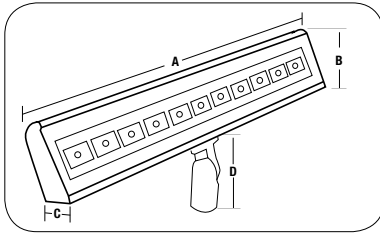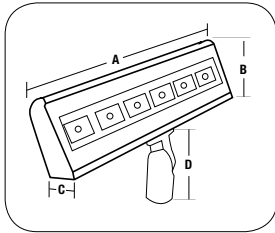

| A | B | C | D |
|--------------|--------|--------|--------|
| 12/24" | 3 1/2" | 1 1/2" | 3 1/2" |
| 305/609.6 mm | 89 mm | 38 mm | 89 mm |

| A | B | C | D |
|--------|--------|--------|--------|
| 5 1/2" | 6 1/2" | 1 1/8" | 2 1/8" |
| 139 mm | 165 mm | 28 mm | 54 mm |

PERFORMANCE

