



Outdoor Lighting

Laredo LCC New LED



- 5000K high CRI LEDs
- 12.4 Watts – 802 Lumens
- Long Life – 50,000 hours
- IDA Compliant – no uplight
- Die cast aluminum housing and door with distinctive decorative ribs
- Superior Performance
- 3 to 1 spacing to mounting height ratio
- 3 to 1 max to min footcandle levels
- Five standard finishes: Bronze, Black, Gray, White and Platinum
- Part of the Southwest Series design & build outdoor lighting solutions
- Made in the U.S.A.



Quick Mounting



Quick mount – easy mounting without opening fixture. Attach adapter plate to wall, connect wires, hang fixture and tighten set screws.

Photo Control



Factory installed button photocontrols. Specify voltage 120/208/240/277V.

12 High Power LEDs



12 – 5000K high CRI LEDs precisely aligned for optimal photometric performance. Provides 3 to 1 spacing to mounting height ratio at 8-10ft.

Surface Wiring



Laredo units have three 1/2" tapped access hubs (top and both sides) for surface conduit wiring.

Polycarbonate Shield



1/8" clear polycarbonate, protects lens and LEDs from vandalism. Field installed.



Rugged, neighbor-friendly, energy-efficient design solutions for outdoor lighting

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Hubbell Outdoor Lighting • 701 Millennium Boulevard Greenville, SC 29607 • www.hubbelloutdoor.com • 864-678-1000

Rev 12.10

ORDERING INFORMATION ON REVERSE SIDE



Healthcare



Office/Warehouse

The LCC LED Laredo is designed for perimeter illumination for safety, security and identity. Typical mounting height is 8 to 10 feet and units can be powder paint finished to either blend or contrast with your building façade. The optical design provides wide spacing capability requiring fewer fixtures on new construction or increased uniformity on retrofit applications.

Key product features include:

- 50,000 hour rated life with a minimum 70% lumen maintenance – eleven plus years in typical applications
- Neutral white 5000K LED color for excellent color rendition
- Wide spacing at typical 8-10ft mounting heights – 25-30ft
- No glare, IDA compliant, neighbor friendly
- Rugged die cast aluminum housing and door with tempered clear glass lens protects the LED system
- Photocontrol option provides energy saving, automatic on/off for dusk-to-dawn lighting
- Five year limited warranty provides assurance for your lighting investment



ORDERING INFORMATION (EXAMPLE)

LCC - 12 L U - 5K - 1 - PC(4)

Laredo LMC LED

SERIES	LEDS / SOURCE / VOLTAGE	COLOR TEMPERATURE	FINISH	OPTIONS
LCC Laredo Compact Cutoff	12 LEDS L LED U Universal Voltage - 120-277V	5K Nominal 5000K High CRI	1 Bronze 2 Black 3 Gray 4 White 5 Platinum	PC(X) Button photocontrol, replace X with voltage, specify 1-120V, 2-208V, 3-240V, 4-277V.

Application Template
8 Ft. Mounting Height

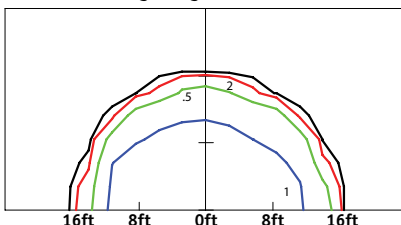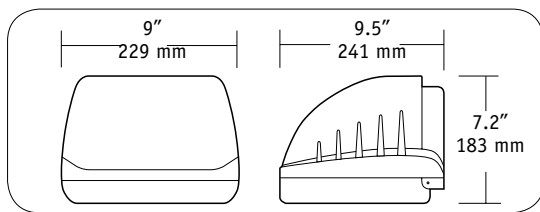

Photometric File
LMC-12LU-5K.IES