

NEW!
3 lumen
packages!



NEW LAREDO® LNC LED COMPACT ARCHITECTURAL WALLPACK

COMPACT BY DESIGN
PACKED WITH PERFORMANCE



- Compact LED wallpack for entry/perimeter applications - 3 lumen output selections!
- Full cut-off neighbor friendly IDA approved
- DesignLights Consortium (DLC) qualified
- 5000K high CRI LEDs
- Long life – 60,000hr L90 rating*
- Acrylic diffuser included! Use for applications near entrances or locations where reduced brightness is desired
- Quick-mount adapter provides easy installation
- Die-cast aluminum housing with decorative Laredo styling
- Designed for both recessed box or surface conduit wiring
- Up to 4:1 spacing to mounting height ratio means greater coverage – fewer fixtures to install
- Choice of bronze, black, white or platinum on LNC 7L/9L fixtures, LNC 5L is bronze only
- Photocontrol option for dusk-to-dawn control
- Listed to UL1598 for use in wet locations



LNC-9L 1460 Lumens



LNC-7L 1147 Lumens



LNC-5L 820 Lumens

High Power LEDs



5/7/9 – 5000K high CRI LEDs precisely aligned for optimal photometric performance. Provides excellent uniformity and spacing up to 40ft as well as mounting heights to 12ft.

Acrylic Diffuser




Frosted acrylic diffuser accessory – included with fixture! Softens output and protects LED lenses. Use near pedestrian entry applications.

Photo Control



Optional factory installed button photocontrols, 120V only.

Quick Mounting



Quick mount – easy mounting without opening fixture. Attach adapter plate to wall, connect wires, hang fixture and tighten set screws.



Rugged, neighbor-friendly, energy-efficient design solutions for outdoor lighting

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Hubbell Outdoor Lighting • 701 Millennium Boulevard Greenville, SC 29607 • www.hubbelloutdoor.com • 864-678-1000 Rev 2.12

ORDERING INFORMATION ON REVERSE SIDE ▼



NEW LAREDO® LNC LED COMPACT ARCHITECTURAL WALLPACK



The compact Laredo LED LNC is designed for perimeter illumination for safety, security and identity. Typical mounting height is up to 12 feet with 40ft fixture spacing (without acrylic diffuser) and 30ft spacing with acrylic diffuser installed. Photocontrol option is available on 120V configured fixtures.

ORDERING INFORMATION (EXAMPLES)

Laredo LNC LED 5L


CATALOG NUMBER	WATTAGE	NUMBER OF LEDS	VOLTAGE	LUMENS ¹	LIFE ²	CCT	WEIGHT LBS. (KG)
LNC-5LU-5K	12.6w	5	120-277V	820	60,000hrs	5000k	4.0 (1.8)
LNC-5LU-5K-PC	12.6w	5	120V	820	60,000hrs	5000k	4.0 (1.8)

1 When using acrylic diffuser accessory lumen output is 614 with increased uniformity
 2 Projected per IESNA TM-21-11

Laredo LNC LED 7L/9L

LNC	-		-		-		-	
Series	LEDS/Source/Voltage	Color Temp.	Distribution	Finish	Options			
	7LU 7 LEDs, 16.4w input, Universal voltage 120-277V, 1147 lumens	5K 5000K high CRI	3 Type III 4 Type IV	1 Bronze 2 Black 4 White 5 Platinum	PC(X) ¹ Button photocontrol replace X with voltage, specify 1-120V, 2-208V, 3-240V, 4-277V			
	9LU 9 LEDs, 20.6w input, Universal voltage 120-277V, 1460 lumens							


Dimensions

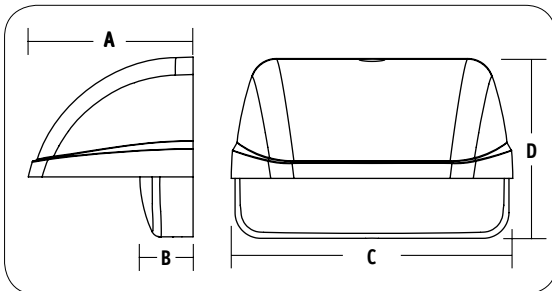

A	B	C	D
4.81"	1.55"	8.22"	5.25"
122 mm	39 mm	209 mm	133 mm

With acrylic diffuser

LNC5LUSKAD.IES

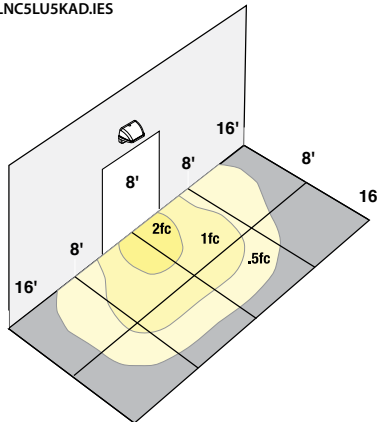

Without acrylic diffuser

LNC5LUSK.IES

