



Outdoor Lighting

Perimaliter® Wallpacks

Perimaliter III PVL3 / PGM3 • Perimaliter II PGL



Solutions for Perimeter/Area Lighting



Perimaliter® Wallpacks



The Perimaliter wallpack has been the design leader in refractor wallpacks for the past 20 years. The construction, optical characteristics and quality manufacture make the Hubbell Perimaliter the most desired refractor solution for perimeter/area lighting from a wall mount. Perimaliter III PVL3 and PGM3 features:

Refractor Selection

- Vandal resistant polycarbonate
- Borosilicate glass

Vertical Lamp Design

- Maximum lamp life
- Maximum lamp lumen output
- Widest lateral spacing (5-6 times mounting height)
- Best application uniformity

Wire Access

- UL required 1.75" minimum back opening for wiring access and inspection
- Side 1/2" hubs for feed thru surface conduit
- Top 1/2" hub for conduit or button photo control

Energy-Saving



- Pulse start (PS) metal halide and HPS technology



Perimaliter® III PVL3

70-150w

Vandal Resistant – High Performance Wallpack

Refractor/Door Assembly

- One-piece injection molded UV stabilized polycarbonate
- 150w pulse start max/medium base lamp (increases lamp to lens distance) - PVL3 reduces lens UV and heat exposure for longer life
- Sharp prism design – Distributes lumens at exact angles, engineered for spacings up to 6 times mounting heights
- Dark Bronze finish is painted on inside of door so projectile impacts will not mar the appearance
- Four point door compression provides seal against moisture and insects, certified for wet locations
- HubbellGard™ fasteners have external coating to prevent chemical interaction in the cast aluminum housing, allows easy service and eliminates screw "Freezing" or "Bonding"
- New improved bottom hinges have been strengthened for durability and years of maintenance-free operation

Vertical Lamp Optics



Medium base up socket provides maximum light output, life and uniformity.

Polycarbonate Refractor



One-piece front, impact resistant, sharp prism performance.

Heavy Duty Hinges



NEW – Two-piece hinge design provides increased strength – resists shipping/installation/maintenance damage.

1/2" Conduit Hubs



1/2" tapped hubs with gasketed plug. PVL3 and PGM3 feature two side hubs and one top hub for superior access.



Lighting Distribution

- Vertical lamp reduces "Hot spot" beneath fixture and provides more lateral lumens for better uniformity
- Wide lateral spacing allows less fixtures to be installed or provides greater light levels and uniformity from closer mounting locations

Results

- Vertical illumination fills application space, increasing pedestrian perception of safety and security
- Eliminates dark walls and "hiding" places

Certified

- CSA certified to UL1598 for use in wet locations



70-250w

Perimaliter® III PGM3

Glass Refractor Wallpack for Wide Spacing Applications

Refractor/Door Assembly

- Borosilicate glass refractor, non-yellowing
- Up to 250w
- Engineered for spacings up to 6 times mounting heights
- Glass is silicone sealed to die cast aluminum door
- 800 series polyester powder paint provides rugged, lasting appearance. Multiple finish selections available
- Four point door compression closure provides seal against moisture and insects, certified for wet locations
- HubbellGard™ fasteners have external coating to prevent chemical interaction on the cast aluminum housing, allows easy service while eliminating screw "Freezing" or "Bonding"
- New improved bottom hinges have been strengthened for durability and years of maintenance free operation

Button Photo Control Accessory



Top hub makes PBT photocontrol installation easy.

Secure Mounting



Two back knockouts 9" on center for rigid installation. 1.75" rear wire access with grommet.

Borosilicate Glass Refractor



Heat resistant, non-yellowing prism design for wide spacing.

Ballast Assembly



Identification and electrical data clearly presented on ballast cover inside fixture door.

EM Bayonet Socket



EM – EM option, a separate double contact bayonet socket for use with back up generators (By others.) (Lamp not included)

QSS – EM socket above plus transfer relay. Senses a lamp that will not re-strike, triggers power to EM socket.

Large application PGL, heavy-duty rugged design. Powered by Pulse-Start for energy savings

The **PGL** family provides higher wattage systems for typical mounting heights of 20-30 feet. This series has many of the same features as the smaller Perimaliter III series and shares the same door and borosilicate glass refractor with the **PGM3**. The housing is nearly 2" deeper to accommodate the higher wattage ballast systems.

Wiring Access

The **PGL** has the same 1/2" wiring hubs on each side but the PBT button photocontrol hub is located on the left side (as you face the unit).

Optics

All sockets are vertical, mogul base.

Systems

PGL is available in 250w and 350w PS MH and 250w and 400w HPS.

Options

EM Egress option – A separate double contact bayonet socket for use with back up generators. These systems allow some level of light during power failures as soon as a building's generator begins to operate.

QSS Standby option- senses if the main lamp is operating when power is available. After a momentary voltage dip, many HID lamps will go off and will not immediately re-strike. This relay switches the power to a DC bayonet socket to power up to a 250w quartz lamp (not included). When the main lamp does strike, the **QSS** system automatically shuts down.



Isolated Ballast Components



PGL Vertical Lamp Optics




Borosilicate Glass Refractor




PGL PC/Conduit Hubs



Typical Photometrics – 150 PS at 15 feet



Vertical Lamp Perimaliter® – Wide lateral spacings 6 times mounting height for 1 FC minimum between fixtures



Horizontal Lamp Wallpack – Mostly forward throw 4 times mounting height spacing for 1FC minimum between fixtures



70-150w

Perimaliter® III PVL3

- One-piece removable polycarbonate lens/door assembly, internally painted for lasting appearance
- 6-to-1 spacing to mounting height ratio, Two HubbellGard® fasteners provide weathertight seal to housing
- Die cast aluminum housing for rugged mounting and heat dissipation; 1/2" feed-thru hubs and top photocontrol hub provided for field installations; standard mount over recessed wiring boxes
- Specular reflector, vertical lamp and refractor combine for efficient and uniform perimeter lighting
- 150w PS or HPS max; 50hz ballastry available
- Socket is porcelain medium base with spring-loaded center contact
- Accessories: Photocontrols/Full cutoff visors
- CSA certified to UL 1598 for use in wet locations



Ordering Information

ORDERING EXAMPLE


PVL3 - **150** **P** - **1** **8** - **BZ** - **L** = **PVL3-150P-18-BZ-L**
 Series - Wattage - Source - Ballast - Voltage - Finish - Options

Catalog Number	Wattage	Lamp Type	Voltage	Ballast	Lamp Included	Weight lbs. (kg)
Pulse Start Metal Halide						
PVL3-070P-18-BZ-L	70	PS	Quad Tap	HX-HPF	Yes	24 (10.9)
PVL3-100P-18-BZ-L	100	PS	Quad Tap	HX-HPF	Yes	25 (11.3)
PVL3-150P-18-BZ-L	150	PS	Quad Tap	HX-HPF	Yes	25 (11.3)
High Pressure Sodium						
PVL3-070S-18-BZ	70	HPS	Quad Tap	AL-HPF	No	23 (10.4)
PVL3-070S-18-BZ-L	70	HPS	Quad Tap	AL-HPF	Yes	23 (10.4)
PVL3-100S-18-BZ	100	HPS	Quad Tap	AL-HPF	No	24 (10.9)
PVL3-100S-18-BZ-L	100	HPS	Quad Tap	AL-HPF	Yes	24 (10.9)
PVL3-150S-18-BZ	150	HPS	Quad Tap	AL-HPF	No	25 (11.3)
PVL3-150S-18-BZ-L	150	HPS	Quad Tap	AL-HPF	Yes	25 (11.3)
PVL3-150S-51-BZ-L	150	HPS	120NPF	HX-NPF	Yes	12 (5.4)

Options - Add Suffix

- EM** Double contact socket for remote power (less lamp)
- QSS** Quartz restrike system including relay (less lamp) (Double contact bayonet socket)
- RS** Hot restrike system, quickly restores main lamp output after power outage. HPS only.
- L** Lamp included with fixture

Dimensions

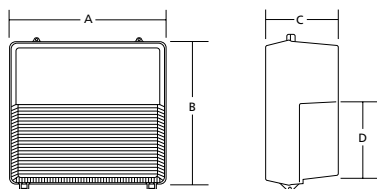

A	B	C	D
14 7/8"	15"	8"	7 7/16"
(378 mm)	(381 mm)	(203 mm)	(189 mm)

Accessories - Order Separately

- PBT-1** Photocontrol, button type, 120V
- PBT-234** Photocontrol, button type, 208, 240, 277V
- PVL3V** Full Cutoff Visor, formed aluminum, Bronze finish

Replacement Parts

- 200-0180-9904** Polycarbonate Front
- 800-3399-0104** Aluminum/Glass Front, Bronze

Notes

- L - Indicates lamp included with the fixture.
- Above units (-18) are Quad Tap (120,208,240,277V. 480V available on 150w units change 8 to 5.
- For TriTap Canadian ballast (120,277,347V) change 8 to 6.
- All units are provided in BZ - Dark Bronze finish.
- 50HZ ballastry is available - Consult factory.

Perimaliter® III PGM3

70-250w



- Cast aluminum removable door with borosilicate glass refractor; Twin HubbellGard™ screw closure for positive seal
- Cast aluminum back housing provides firm mounting and heat dissipation. Mounts over recessed wiring boxes; Two 1/2" conduit hubs for feed-thru wiring and top hub for field installation of photocontrol
- Specular aluminum reflector, vertical lamp and refractor prisms combine for excellent perimeter lighting, provides 5-6 times spacing
- PGM3 is 250w max
- Socket is porcelain medium base with spring-loaded center contact, for all offerings below 250w, 250w units are mogul base
- Bronze powder standard paint finish, consult factory for other finishes available
- CSA certified to UL 1598 for use in wet locations



Ordering Information

ORDERING EXAMPLE

PGM3 - **150** **P** - **1** **8** - **BZ** - **EM** - **L** = **PGM3-150P-18-BZ-EM-L**
 Series Wattage Source Ballast Voltage Finish Options Lamp

Catalog Number	Wattage	Lamp Type	Voltage	Ballast	Lamp Included	Weight lbs. (kg)
Pulse Start Metal Halide						
PGM3-070P-18-BZ-L	70	PS	Quad Tap	HX-HPF	Yes	24 (10.9)
PGM3-100P-18-BZ-L	100	PS	Quad Tap	HX-HPF	Yes	25 (11.3)
PGM3-150P-18-BZ-L	150	PS	Quad Tap	CWA-HPF	Yes	25 (11.3)
PGM3-250P-18-BZ-L	250	PS	Quad Tap	CWA-HPF	Yes	27 (12.2)
High Pressure Sodium						
PGM3-070S-18-BZ	70	HPS	Quad Tap	HX-HPF	No	23 (10.4)
PGM3-100S-18-BZ	100	HPS	Quad Tap	HX-HPF	No	24 (10.9)
PGM3-150S-18-BZ	150	HPS	Quad Tap	HX-HPF	No	25 (11.3)
PGM3-150S-18-BZ-L	150	HPS	Quad Tap	HX-HPF	Yes	25 (11.3)
PGM3-250S-18-BZ	250	HPS	Quad Tap	CWA-HPF	No	30 (13.6)
PGM3-250S-18-BZ-L	250	HPS	Quad Tap	CWA-HPF	Yes	33 (14.9)
Less Ballast						
PGM3-LB†	250Max	None	None		No	15 (6.8)


Options - Add Suffix

- EM Double contact socket for remote power (less lamp)
- QSS Quartz restrike system including relay (less lamp) (Double contact bayonet socket)
- RS Hot restrike system, quickly restores main lamp output after power outage. HPS only, 150w maximum.
- L Lamp included with fixture

Accessories - Order Separately

- PBT-1** Photocontrol, button type, 120V
 - PBT-234** Photocontrol, button type, 208, 240, 277V
 - PG-PS¹** Polycarbonate shield for refractor
 - PG-WG¹** Wire guard for refractor
 - PVL3V** Full Cutoff Visor, formed aluminum, Bronze finish
- 1 - Guard and shield can be used on the same fixture

Dimensions

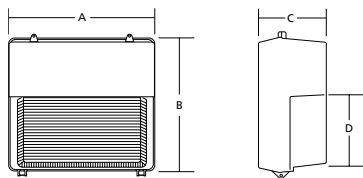

A	B	C	D
14 7/8"	15"	8"	6 13/16"
(378 mm)	(381 mm)	(203 mm)	(173 mm)

Replacement Parts

- 800-3399-0104** Lens Door Assembly, Bronze

Notes

- L - Indicates lamp included with the fixture.
- Above units (-18) are Quad Tap (120,208,240,277V. 480V available on 150/250w units change 8 to 5.
- For TriTap Canadian ballast (120,277,347V) change 8 to 6.
- BZ - Dark Bronze finish is standard. For alternate finish - consult factory for price adder and availability.
- Finishes available with adder:** BL- Black, GR- Gray, WH- White, PS - Platinum.
- 50HZ ballastry is available - Consult factory.
- †Socket is mogul base/finish is Bronze on less ballast unit.



250-400w

Perimaliter® II PGL

- Cast aluminum removable door with borosilicate glass refractor; Twin HubbellGard® screw closure for positive seal
- Cast aluminum back housing provides firm mounting and heat dissipation. Mounts over recessed wiring boxes; Two 1/2" conduit hubs for feed-thru wiring and side hub for field installation of photocontrol
- Specular aluminum reflector, vertical lamp position and refractor prisms combine for excellent perimeter lighting, Provides 5-6 times spacing
- PGL is mogul base 250-400w max
- Bronze powder standard paint finish, consult factory for other finishes available
- CSA certified to UL 1598 for use in wet locations



Ordering Information

ORDERING EXAMPLE

PGL - **350** **P** - **1** **2** **8** - **1** - **EM** = **PGL-350P-128-1-EM**
 Series Wattage Source Ballast Version Voltage Finish Options

Catalog Number	Wattage	Lamp Type	Voltage	Ballast	Lamp Included	Weight lbs. (kg)
Pulse Start Metal Halide						
PGL-250P-128-1-LP	250	PS	Quad Tap	CWA-HPF	Yes	30 (13.6)
PGL-320P-128-1	320	PS	Quad Tap	CWA-HPF	No	32 (14.5)
PGL-350P-128-1	350	PS	Quad Tap	CWA-HPF	No	33 (14.8)
PGL-350P-128-1-LP	350	PS	Quad Tap	CWA-HPF	Yes	33 (14.8)
High Pressure Sodium						
PGL-250S-128-1	250	HPS	Quad Tap	CWA-HPF	No	32 (14.5)
PGL-400S-128-1	400	HPS	Quad Tap	CWA-HPF	No	36 (16.2)
PGL-400S-128-1-LP	400	HPS	Quad Tap	CWA-HPF	Yes	36 (16.2)

Options - Add Suffix


- EM Double contact socket for remote power (less lamp)
- QSS Quartz restrrike system including relay (less lamp) (Double contact bayonet socket)
- L Lamp shipped in separate carton

Accessories - Order Separately

- PBT-1** Photocontrol, button type, 120V
- PBT-234** Photocontrol, button type, 208, 240, 277V
- PTA-8** Photocontrol, external, weather tight, 120, 208, 240, 277V
- PG-PS¹** Polycarbonate shield for refractor
- PG-WG¹** Wire guard for refractor
- PVL3V** Full Cutoff Visor, formed aluminum, Bronze finish

¹ - Guard and shield can be used on the same fixture

Dimensions

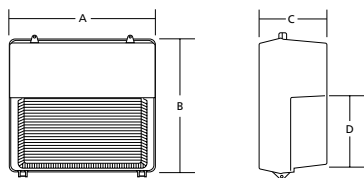

A	B	C	D
14 7/8"	15"	9 7/8"	6 13/16"
(378 mm)	(381 mm)	(251 mm)	(173 mm)

Replacement Parts

800-3399-0104 Lens Door Assembly, Bronze

Notes

LP - Indicates lamp included with the fixture.

Above units are Quad Tap (120,208,240,277V. For 480V change 8 to 5.

For TriTap Canadian ballast (120,277,347V) change 8 to 6.

BZ - Dark Bronze finish is standard. For alternate finish - consult factory for price adder and availability.

Finishes available with adder: 2- Black, 3- Gray, 4- White.

50HZ ballastry is available - Consult factory.



Outdoor Lighting

701 Millennium Boulevard
Greenville, SC 29607

Tel: 864.678.1000

Fax: 864.678.1417

www.hubbelloutdoor.com



Hubbell Lighting Inc. Distinguished Lighting Brands

Alera Lighting
Architectural Area Lighting
Beacon Products
Columbia Lighting
Compass Products
Devine Lighting
Dual-Lite
HomeStyle Lighting
Hubbell Outdoor Lighting
Hubbell Industrial Lighting
Kim Lighting

Kurt Versen
Paragon Lighting
Prescolite
Progress Lighting
Precision Lighting
Security Lighting
Spaulding Lighting
Sportsliter Solutions
Stern Lighting Systems
Thomas Research Products
Thomasville Lighting
Whiteway

For more information visit our web site: www.hubbell-ltg.com