

- Use for wall or ceiling applications at entrances, stairs, corridors or single story building accent
- Borosilicate glass lens with silicone gasket; Shields the lamp and softly spreads the light in a symmetrical distribution
- Die-cast aluminum housing and face trims; Two point lag mount or hickey mount to recessed wiring boxes; (no side conduit feeds); Twin stainless steel screws secure the trims and lens to the housing
- 50w HPS, 28w CFL (-20 degree starting) and 100w max incandescent
- BRLU LED unit available in 15w, 120-277V, 830 lumens, 5000K
- Lamp included on HPS and CFL sources
- Finishes in dark bronze, white and black
- Listed to UL1598 for use in wet locations



WALL/SURFACE

ORDERING INFORMATION

Catalog Number	Shape	Finish	Wattage	Weight lbs. (kg)
LED (lamps included)⁴				
BRLU-01	Round	Bronze	15w	6.0 (2.7)
BRLU-04	Round	White	15w	6.0 (2.7)
Incandescent - Medium Base Socket				
BRI-01	Round	Bronze	100 max.	4 (1.8)
BRI-02	Round	Black	100 max.	4 (1.8)
BRI-04	Round	White	100 max.	4 (1.8)
BOI-01	Oval	Bronze	100 max.	3.5 (1.6)
BOI-02	Oval	Black	100 max.	3.5 (1.6)
BOI-04	Oval	White	100 max.	3.5 (1.6)
High Pressure Sodium (lamp included)² - Medium Base Socket				
BRS-01	Round	Bronze	50	7.5 (3.4)
BRS-02	Round	Black	50	7.5 (3.4)
BRS-04	Round	White	50	7.5 (3.4)
BOS-01	Oval	Bronze	50	7 (3.2)
BOS-02	Oval	Black	50	7 (3.2)
BOS-04	Oval	White	50	7 (3.2)
Compact Fluorescent (lamp included)^{1, 3}				
BRF-01	Round	Bronze	28	6 (2.7)
BRF-02	Round	Black	28	6 (2.7)
BRF-04	Round	White	28	6 (2.7)
BOF-01	Oval	Bronze	28	5.5 (2.5)
BOF-02	Oval	Black	28	5.5 (2.5)
BOF-04	Oval	White	28	5.5 (2.5)

1 Fluorescent CSA certified for outdoor applications only, not available in 277V (Alternate: see Hercules HVS Series)


2 Pulse-rated medium base socket

3 Two-pin fluorescent socket - PLC28, 2700K, -20°F starting

4 LED Color temperature 5000K, 6 LEDs at 700mA, 830 lumens, 120-277V, 50/60Hz

ACCESSORIES - Order Separately


Catalog Number	Description
BO-GX¹	Cast aluminum guard for oval fixture
BR-GX¹	Cast aluminum guard for round fixture
BO-SX¹	Cast aluminum shield for oval fixture
BR-SX¹	Cast aluminum shield for round fixture



REPLACEMENT PARTS

Catalog Number	Description
266-0067-9904	BR replacement lens
266-0068-9904	BO replacement lens

1 Finish must be specified, substitute X for: 1-bronze, 2-black, 4-white.

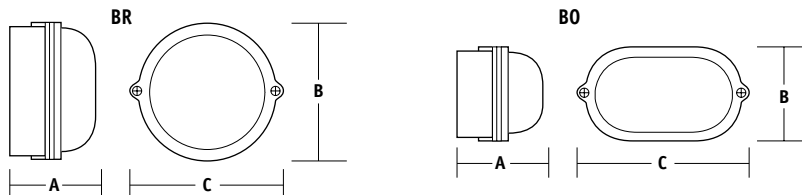

	A	B	C
BR Round	5 1/2"	9 1/2"	10 1/8"
	140 mm	241 mm	257 mm
BO Oval	5 1/2"	6 1/4"	11 1/4"
	140 mm	159 mm	286 mm



Outdoor Lighting