

Laredo LCC

Compact Wallpack

The compact Laredo is designed for entrance and single story perimeter lighting, 6-12 foot applications. Systems include energy-saving Pulse Start, CFL, HPS, and LED. Housing and door are die-cast aluminum. Protective lens is tempered glass. All units have no uplight and are full cut-off IDA compliant, neighbor friendly, so light trespass and glare will not be an issue after installation.

APPLICATIONS

Full cut-off, IDA compliant entry or perimeter lighting. LCC is Listed to UL1598 for use in wet locations.

- Features exclusive wiHUBB technology
 - Wireless system for On/Off and 0-10VDC full range dimming control
 - Programmable autonomous operation



WALLPACKS

ORDERING INFORMATION


| | | | | | | |
|-----------------------------------|---|--|---|--|---|--|
| LCC | - | [] | - | [] | - | [] |
| SERIES | | WATTAGE/SOURCE/VOLTAGE | | FINISH | | OPTIONS |
| LCC Laredo Compact Cut-off | | FLUORESCENT | | <ol style="list-style-type: none"> 1 Bronze 2 Black 3 Gray 4 White 5 Platinum | | PHOTOCONTROL |
| | | 26F8 26w, 120-277V 32F8 32w, 120-277V 42F8 42w, 120-277V PULSE START METAL HALIDE (MED. BASE) 50P8 50w, 120-277V 70P8 70w, 120-277V HIGH PRESSURE SODIUM (MED. BASE) 50S1 50w, 120V NPF 70S1 70w, 120V NPF 50S8 50w, 120-277V 70S8 70w, 120-277V LED 12LU-5K 12w, 120-277V, 50/60Hz (5000K, 802 lumens) | | | | PC1 120V button photocontrol PC2¹ 208V button photocontrol PC3¹ 240V button photocontrol PC4¹ 277V button photocontrol EM Egress lamp socket, mini-can base socket for remote power by others (max 50w halogen recommended); N/A on LED LP Lamp included; Lamp shipped in carton with fixture, CFL lamps are 3500K; Standard on LED units WIH-IM² In fixture wireless control module, pg. 381 |
| | | | | | | 1 For use on CFL and LED units only 2 Consult factory for availability |

ACCESSORIES - Order Separately

| Catalog Number | Description |
|----------------------------|--|
| LCC-SPC | Polycarbonate shield |
| PBT-1 | 120V button photocontrol |
| PBT-234¹ | 208/240/277V button photocontrol |
| PTA-1 | External 120V photocontrol (use for 70w) |
| PTA-8 | External 120-277V photocontrol (use for 70w) |

REPLACEMENT PARTS

| Catalog Number | Description |
|-----------------|-----------------------------|
| 93012460 | Replacement lens all others |

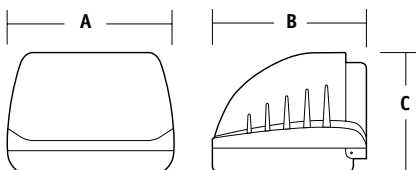

| A | B | C |
|--------|--------|--------|
| 9.0" | 9.5" | 7.2" |
| 229 mm | 241 mm | 183 mm |



Outdoor Lighting