

Laramie LFS

Compact Decorative Flood

FLOODLIGHTING



The LFS Series is the wide, uniform beam lighting solution for sign, façade and general lighting of smaller areas. The die-cast construction is not only rugged but has new styling that matches the larger Laramie 400 and other fixtures in the "Southwest" family.

A wide variety of lighting systems is offered, including pulse start metal halide, compact fluorescent, high pressure sodium, and LED packages. These systems allow the designer a wide range in lumen, energy and maintenance considerations.

Three new LED distributions provide optimized lighting solution options.

Cataloged in five standard finishes, the LFS fixture can be ordered to blend or contrast with most architectural elements. The Lektrocote® powder paint system is baked on for long life and minimum color change due to UV exposure.

Units are shipped less lamp as standard but lamps are available if desired along with button photocontrols for dusk-to-dawn energy savings. PS and HPS fixtures have medium base sockets.

- 1/2" swivel knuckle allows universal aiming from standard junction boxes and adapters
- Listed to UL1598 for use in wet locations
- U.S. Patent No. 6,461,026

ORDERING INFORMATION

SERIES	WATTAGE/SOURCE	VOLTAGE	FINISH	OPTIONS
LFS Laramie Flood Small	PULSE START METAL HALIDE 50P 50w 70P 70w 100P 100w 150P 150w HIGH PRESSURE SODIUM 50S 50w 70S 70w 100S 100w 150S 150w COMPACT FLUORESCENT¹ 26F 26w 32F 32w 42F 42w LED² 12LU-5K-W 12w, 6x6 12LU-5K-M 12w, 4x4 12LU-5K-N 12w, 1x1	1 120V (H.I.D. reactor) 6 Tri-Tap (H.I.D. only) (120, 277, 347V) 8 ¹ Quad - Tap [®] (120, 208, 240, 277V) (standard on CFL) Leave cell blank for LED	BZ Bronze BL Black GR Gray WH White PS Platinum	LP Lamp included (H.I.D. or CFL) P(1) 120V button photocontrol ³ P(2) 208V button photocontrol ³ P(3) 240V button photocontrol ³ P(4) 277V button photocontrol ³ P(6) 347V button photocontrol

ACCESSORIES - Order Separately, Field Installed


Catalog Number	Description
PBT-1	Button photocontrol 120V
PBT-234	Button photocontrol 208, 240, 277V
NM-BC	Non-metallic box and cover burial box with cable connectors
S-302-M51	2" pipe (2 3/8" O.D.) slip-fitter with 1/2" top hub for LFS/LFP, bronze
S-302-M52	2" pipe (2 3/8" O.D.) slip-fitter with 1/2" top hub for LFS/LFP, white
S-302	2" pipe (2 3/8" O.D.) slip-fitter with 1/2" top hub for LFS/LFP, platinum/gray
S329B	Wet location surface box with cover, (4) side and (1) cover 1/2" hub, nat. alum.
1031-3	Portable spike with 1/2" top hub and 6ft cord set, platinum/gray finish
LFP-JB-BZ	Round pole-side junction box with hardware, 1/2" cover and bottom hub, bronze
LFS-SPC	Polycarbonate shield
LFS-GS	Glare shield, black
MIC-TB	Half yoke wiring box, bronze

REPLACEMENT PARTS

Catalog Number	Description
93004823	Replacement lens
207-5011-0264	Bronze knuckle

Typical weight: 12 lbs.
EPA: 0.7 sq.ft.

1 CFL available in 8 (Quad-Tap[®]) voltage only
2 LED is 120-277V, 50/60hz, 5000K, 12.8 input watts
3 Change "12LU" to 12L1 for 120V, 12L2 for 208V, 12L3 for 240V or 12L4 for 277V

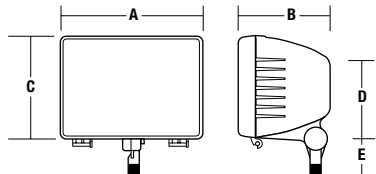

	A	B	C	D	E
LFS	10.25"	6.5"	8"	4"	2.5"
	260 mm	165 mm	203 mm	102 mm	63.5



Outdoor Lighting