

Laredo LLC

Large Wallpack

WALLPACKS



The large Laredo can be mounted from 16-25 feet with HID lamps or lower for egress applications with twin fluorescent lamps and redundant battery back up. Series is capable of up to 400w energy-saving Pulse Start and HPS. User-friendly maintenance options, such as the touch latch door, allow easy service.

Fixtures have rugged die-cast aluminum construction and tempered glass lens. H.I.D. units have mogul base sockets.

APPLICATIONS

Full cut-off, IDA compliant perimeter lighting. LLC is listed to UL1598 for use in wet locations.

Egress application with integral redundant lamp, battery capability

ORDERING INFORMATION

LLC			
SERIES	WATTAGE/SOURCE/VOLTAGE	FINISH	OPTIONS
LLC Laredo Large Cut-off	PULSE START METAL HALIDE 250P8 250w, 120/277V 250P5 250w, 480V 250P6 250w, Tri-Tap® 120,277,347V 320P8 320w, 120/277V 320P5 320w, 480V 320P6 320w, Tri-Tap® 120,277,347V 350P8 350w, 120/277V 350P5 350w, 480V 350P6 350w, Tri-Tap® 120,277,347V 400P8 400w, 120/277V 400P5 400w, 480V 400P6 400w, Tri-Tap® 120,277,347V ELECTRONIC FLUORESCENT 64F8 2x26w/2x32w/120-277V HIGH PRESSURE SODIUM 250S8 250 watt, 120/277V 250S5 250 watt, 480V 250S6 250 watt, Tri-Tap® 120,277,347V 250SV 250 watt, Five Tap 400S8 400 watt, 120/277V 400S5 400 watt, 480V 400S6 400 watt, Tri-Tap® 120,277,347V 400SV 400 watt, Five Tap	1 Bronze 2 Black 3 Gray 4 White 5 Platinum	PC1¹ Button photocontrol 120V QST Time delay quartz standby EM DC bayonet socket only (use 150w max. lamp) TL Touch latch BBUXXX² Battery back up rated to -4°F for one CFL lamp 2BBUXXX² Battery back up rated to -4°F for two CFL lamps BOCXXX² Battery back up rated to 32°F for one CFL lamp 2BOCXXX² Battery back up rated to 32°F for two CFL lamps LP Lamp included with fixture (on CFL specify LP52 or LP64)

1 Suitable for 320w units max
2 Specify 120 or 277V


ACCESSORIES - Order Separately

Catalog Number	Description
LLC-SPC	Polycarbonate shield
PBT-1¹	120V button photocontrol
PBT-234²	208/240/277V button photocontrol
PTA-1	External photocontrol 120V (use for 320w and above)
PTA-8	External photocontrol 120-277V (use for 320w and above)
PTA-5	External photocontrol 480V (use for 320w and above)

1 Suitable for 320w units max
2 Use only with CFL units

REPLACEMENT PARTS

Catalog Number	Description
93010804	Replacement lens

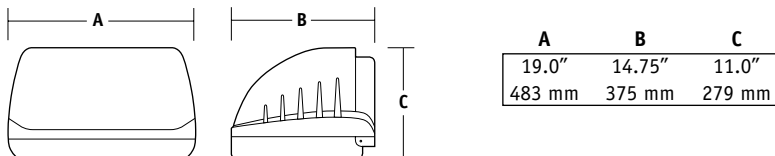

Outdoor Lighting