

Laredo LMC-30LU LED

Medium-Size Wallpack

Laredo 30 LED medium size wallpack offers both wide spacing and excellent uniformity. The 30 LED unit is available in lumen packages ideal for mounting heights from 12 to 18 feet; providing spacings of up to five times the mounting height. The 30 LED unit is available in a wide Type III or forward throw Type IV beam.

The fixture is constructed of durable die-cast aluminum housing and door. The Laredo features a quick-mount adapter that allows

installation without ever opening the fixture. Save on installation time, fixture maintenance and energy!

APPLICATIONS

Full cut-off, IDA compliant perimeter lighting. Listed to UL1598 for use in wet locations when mounted aimed down.




ORDERING INFORMATION

SERIES	NUMBER OF LEDS/SOURCE/VOLTAGE	CCT	IES DISTRIBUTION	DRIVE CURRENT	FINISH	OPTIONS
LMC Laredo Medium Cut-off	30LU 30 LEDs	4K 4000K nominal 5K 5000K nominal	3^{1,3} Type III 4^{1,3} Type IV	BLANK Std. is 700mA 71w 035³ 350mA 35w	1 Bronze 2 Black 3 Gray 4 White 5 Platinum	PC(X)² Photocontrol WIH In fixture wireless control module (120V or 277V only), pg. 381

ACCESSORIES - Order Separately

Catalog Number	Description
LMC-SPC	Polycarbonate shield
PBT-1	120V button photocontrol
PBT-234	208/240/277V button photocontrol

- Standard 700MA Type III distribution produces 4673 lumens, Type IV 4507 lumens at 71w
- PC(X) Replace X with 1-120V, 2-208V, 3-240V, 4-277V
- 350mA Type III distribution produces 2500-2700 lumens at 35watts

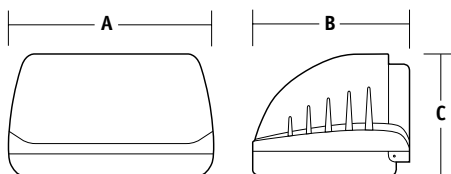

A	B	C
16"	12.125"	9.0"
406 mm	308 mm	229 mm



Outdoor Lighting