

Laredo LMC LED

Medium-Size Wallpack

Laredo medium-size is available in two LED lumen packages, both with wide spacing and excellent uniformity. The 18 LED unit is perfect for 8-12ft applications providing spacings of up to 45 feet between fixtures. The 30 LED unit is designed for higher mounting applications of 14-18ft and is available in a wide Type III or forward throw Type IV beam.

The fixture is constructed of durable die-cast aluminum housing and door. The Laredo features a quick mount adapter that allows installation without ever opening the fixture.

Save on installation time, fixture maintenance and energy!

The 18 LED unit is available with battery back-up at 120V or 277V to provide egress illumination where needed.

- Features exclusive wiHUBB technology
 - Wireless system for On/Off and 0-10VDC full range dimming control
 - Programmable autonomous operation



WALLPACKS

ORDERING INFORMATION

LMC	-	[]	-	5K	-	[]	-	[]
SERIES	NUMBER OF LEDS/SOURCE/VOLTAGE		CCT	IES DISTRIBUTION ¹	FINISH	OPTIONS		
LMC Laredo Medium Cut-off	18LU 18 LEDs, 2038 lumens, 44.5w input	30LU 30 LEDs, 4500 lumens, 71w input	5K 5000K nominal	3 ⁴ Type III 4 Type IV	1 Bronze 2 Black 3 Gray 4 White 5 Platinum	PC(X) ² Photocontrol	BOC-LED(X) ³ Battery back-up	WIH-IM ⁵ In fixture wireless control module, pg. 381


ACCESSORIES - Order Separately

Catalog Number	Description
LMC-SPC	Polycarbonate shield
PBT-1	120V button photocontrol
PBT-234	208/240/277V button photocontrol

REPLACEMENT PART

Catalog Number	Description
7737101	Replacement Lens

- ¹ IES distribution applies to 30L units only
- ² PC(X) Replace X with 1-120V, 2-208V, 3-240V, 4-277V
- ³ BOC-LED(X) Applies to 18L unit only; Replace X with 1-120 or 4-277V
- ⁴ 30L Type III distribution produces 4673 lumens
- ⁵ Dimming feature with 30LED model only; On/Off with all models

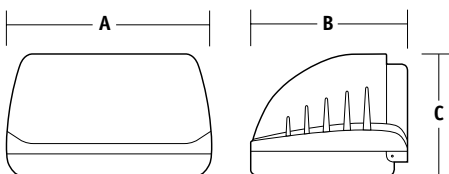

A	B	C
16"	12.125"	9.0"
406 mm	308 mm	229 mm



Outdoor Lighting