

# NRG<sup>®</sup> 31X

## Shielded Wallpack

- Clear polycarbonate lens with recessed phillips head retaining screws; An undercut fit provides water shedding, wet location listing
- Cast aluminum housing mounts to recessed junction boxes and provides lamp arc tube shielding at 90 degrees
- 4 to 1 spacing to mounting height ratio with two mounting height forward throw
- Additional shielding can be added in the field by applying the light trespass inhibitor (included) along the lens, top or sides
- Available in 50 and 70w HPS or 50w PSMH 120/277V; Lamp included
- Dark bronze powder paint finish
- Listed to UL 1598 for use in wet locations




WALLPACKS

### ORDERING INFORMATION

| Catalog Number                  | Wattage | Voltage | Ballast Type | Weight lbs. (kg) |
|---------------------------------|---------|---------|--------------|------------------|
| <b>High Pressure Sodium</b>     |         |         |              |                  |
| <b>NRG-311</b>                  | 50      | 120/277 | AL-HPF       | 6.5 (3)          |
| <b>NRG-317</b>                  | 70      | 120/277 | AL-HPF       | 7.5 (3.4)        |
| <b>Pulse Start Metal Halide</b> |         |         |              |                  |
| <b>NRG-315</b>                  | 50      | 120/277 | AL-HPF       | 6.5 (3)          |

Note All units have dark bronze powder paint finish, 120/277 dual voltage ballasts, and include medium base lamp  
 Note No options or accessories available.

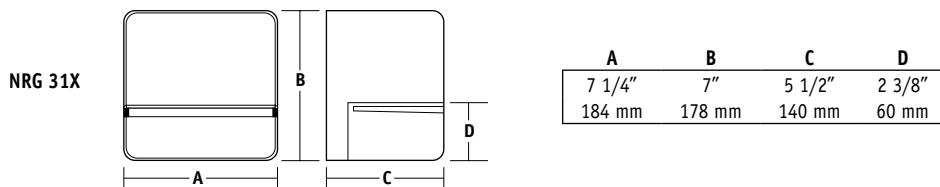

Outdoor Lighting