

# Perimaliter® PGL

## Vertical Lamp Position Glass Refractor Wallpack

WALLPACKS



- Cast aluminum door with borosilicate glass refractor; Bottom hinge allows door removal; Twin HubbellGard® screw closure for positive seal
- Cast aluminum back housing provides firm mounting and heat dissipation; Mounts over recessed wiring boxes; Has two 1/2" conduit hubs for feed-through wiring; Side hub for field installation of photocontrol
- Specular aluminum reflector, vertical lamp position and refractor prisms combine for excellent perimeter lighting; Provides 5 times spacing to mounting height
- PGL is mogul base 250-400w max
- Bronze powder paint finish is standard, other finishes available, consult factory
- Listed to UL 1598 for use in wet locations

### ORDERING INFORMATION

Catalog Number	Wattage	Lamp Type	Voltage	Ballast	Lamp Included	Weight lbs. (kg)
<b>Pulse Start Metal Halide</b>						
<b>PGL-250P-128-1-LP</b>	250	PSMH	Quad Tap	CWA-HPF	Yes	30 (13.6)
<b>PGL-320P-128-1</b>	320	PSMH	Quad Tap	CWA-HPF	No	25 (14.5)
<b>PGL-350P-128-1</b>	350	PSMH	Quad Tap	CWA-HPF	No	25 (15.0)
<b>PGL-350P-128-1-LP</b>	350	PSMH	Quad Tap	CWA-HPF	Yes	27 (15.0)
<b>High Pressure Sodium</b>						
<b>PGL-250S-128-1</b>	250	HPS	Quad Tap	CWA-HPF	No	32 (14.5)
<b>PGL-400S-128-1</b>	400	HPS	Quad Tap	CWA-HPF	No	36 (16.3)
<b>PGL-400S-128-1-LP</b>	400	HPS	Quad Tap	CWA-HPF	Yes	36 (16.3)

- Notes:
- LP - Indicates lamp included with the fixture.
  - Above units are Quad Tap (120,208,240,277V ED28 lamps are required)
  - For Tri-Tap Canadian ballast (120,277,347 volt) change 8 to 6
  - Dark Bronze finish (-1) is standard; For alternate finish (2- Black, 3- Gray, 4- White) - consult factory for price adder and availability
  - 50Hz ballast is available - Consult factory

### ACCESSORIES - Order Separately

Catalog Number	Description
<b>PBT-1</b>	Photocontrol, button type, 120V
<b>PBT-234</b>	Photocontrol, button type, 208, 240, 277V
<b>PTA-8</b>	Photocontrol, external, weather tight, 208, 240, 277V
<b>PG-PS<sup>1</sup></b>	Polycarbonate shield for refractor
<b>PG-WG<sup>1</sup></b>	Wire guard for refractor
<b>PVL3V</b>	Full cut-off visor, formed aluminum, bronze finish


<sup>1</sup> Guard and shield can be used on the same fixture

### OPTIONS - Add Suffix

Catalog Number	Description
<b>-EM</b>	Double contact socket for remote power (less lamp) all units
<b>-QSS</b>	Quartz restrike system including relay (less lamp) all units (Double contact bayonet socket)
<b>-UST</b>	Substantially transformed version in the U.S. meeting level 2 of the Buy American Act

### REPLACEMENT PART

Catalog Number	Description
<b>800-3399-0104</b>	Lens door assembly, bronze

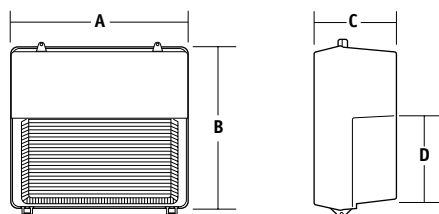

	A	B	C	D
<b>PGL</b>	14 7/8"	15"	9 7/8"	6 13/16"
	378 mm	381 mm	251 mm	173 mm



Outdoor Lighting