

# Perimashield® PGSA3 PGSB

## Glass Refractor Wallshield

- Clear borosilicate glass lens allows shielded lamp to direct main beam downwards; Cast aluminum door supports glass, seals to housing gasket with twin HubbellGard® fasteners; Door is hinged, can be easily removed
- Cast aluminum back housing mounts over recess wiring boxes or allows feed-through wiring through 1/2" side hubs; Top hub provided for field installation of photocontrol
- Shielded lamp above a specular hammertone reflector provides beam control; Socket is adjustable for deeper shielding
- Dark bronze powder paint finish is standard, other finishes available, consult factory
- Lamp included
- Listed to UL 1598 for use in wet locations



WALLPACKS

### ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast	Weight lbs. (kg)
<b>Medium Size - Medium Base Socket - Medium Base Lamp Included</b>			
<b>High Pressure Sodium</b>			
PGSA3-070S-18-BZ-L	70	Quad/AL (HPF)	18 (8.2)
PGSA3-100S-18-BZ-L	100	Quad/AL (HPF)	18 (8.2)
PGSA3-150S-18-BZ-L	150	Quad/AL (HPF)	18 (8.2)
<b>Pulse Start Metal Halide</b>			
PGSA3-070P-18-BZ-L	70	Quad/AL (HPF)	22 (10)
PGSA3-100P-18-BZ-L	100	Quad/PLA (HPF)	22 (10)
PGSA3-150P-18-BZ-L	150	Quad/PLA (HPF)	23 (10.4)

Note: Units are Quad-Tap®; For Tri-Tap® (120/277/347V) change 8 to 6, for 480V change 8 to 5; Standard finish is dark bronze; For 50Hz ballast, consult factory  
Note: 50Hz, 220/240V available

Catalog Number	Wattage	Voltage/Ballast	Weight lbs. (kg)
<b>Large Size - Mogul Base Socket - Mogul Base Lamp Included</b>			
<b>High Pressure Sodium</b>			
PGS-B250S-128-1	250	Quad/AL (HPF)	31 (14.1)
PGS-B400S-128-1	400	Quad/AL (HPF)	35 (15.9)
<b>Pulse Start Metal Halide</b>			
PGS-B250P-128-1	250	Quad/AL (HPF)	29 (13.1)
PGS-B350P-128-1	350	Quad/PLA (HPF)	32 (14.5)

Note: Units are Quad-Tap®; For Tri-Tap® (120/277/347V) change 8 to 6, for 480V change 8 to 5; Standard finish is dark bronze; For 50Hz ballast, consult factory  
Note: 50Hz, 220/240V available

### REPLACEMENT PART

Catalog Number	Description
800-3398-0104	Lens door, bronze


### ACCESSORIES - Order Separately

Catalog Number	Description
PBT-1	Photocontrol, 120V
PBT-234	Photocontrol, 208, 240, 277V
PG-PS <sup>1</sup>	Polycarbonate shield for refractor
PG-WG <sup>1</sup>	Wire guard for refractor
PVL3V	Full cut-off visor, formed aluminum, bronze finish

<sup>1</sup> Guard and shield can be used on the same fixture

### OPTIONS - Add Suffix

Catalog Number	Description
-EM	Double contact socket for remote power (less lamp) all units
-QSS	Quartz restrrike system including relay (less lamp) all units (double contact bayonet socket)

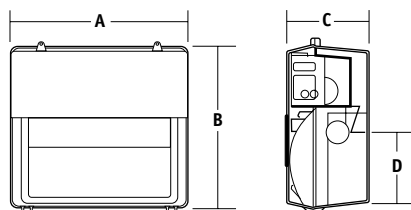

	A	B	C	D
PGSA3	14 7/8"	15"	8"	4 3/8"
	378 mm	381 mm	203 mm	111 mm



Outdoor Lighting