

# Perimaliter® PVL3

## Vertical Lamp Position Polycarbonate Refractor Wallpack

WALLPACKS



- One-piece polycarbonate lens, internally painted for lasting appearance. 6 to 1 spacing to mounting height ratio. Two HubbellGard® fasteners provide weathertight seal to housing. Door hinges and is removable.
- Housing is die cast aluminum for rugged mounting and heat dissipation. 1/2" feed-through hubs provided and top photocontrol hub location for field installation. Standard mount is over recessed wiring boxes. Fixtures have dark bronze finish.
- Specular reflector, vertical lamps and refractor combine for efficient and uniform perimeter lighting. Max wattage is 150PS or 150HPS. 50HZ ballastry available.
- Socket is porcelain medium base with spring-loaded center contact.
- Accessories: Photocontrols/Full cut-off visors.
- CSA certified to UL 1598 for use in wet locations.

### ORDERING INFORMATION

Catalog Number	Wattage	Lamp Type	Voltage	Ballast	Lamp Included	Weight lbs. (kg)
<b>Pulse Start Metal Halide</b>						
PVL3-070P-18-BZ-L	70	PS	Quad Tap	HX-HPF	Yes	24 (10.9)
PVL3-100P-18-BZ-L	100	PS	Quad Tap	HX-HPF	Yes	25 (11.3)
PVL3-150P-18-BZ-L	150	PS	Quad Tap	HX-HPF	Yes	25 (11.3)
<b>High Pressure Sodium</b>						
PVL3-070S-18-BZ	70	HPS	Quad Tap	AL-HPF	No	23 (10.4)
PVL3-070S-18-BZ-L	70	HPS	Quad Tap	AL-HPF	Yes	23 (10.4)
PVL3-100S-18-BZ	100	HPS	Quad Tap	AL-HPF	No	24 (10.9)
PVL3-100S-18-BZ-L	100	HPS	Quad Tap	AL-HPF	Yes	24 (10.9)
PVL3-150S-18-BZ	150	HPS	Quad Tap	AL-HPF	No	25 (11.3)
PVL3-150S-18-BZ-L	150	HPS	Quad Tap	AL-HPF	Yes	25 (11.3)
PVL3-150S-51-BZ-L	150	HPS	120NPF	HX-NPF	Yes	12 (5.4)

L - Indicates lamp included with the fixture  
 Above units (-18) are Quad Tap (120,208,240,277 volt) 480 volt available on 150 watt unit, change -18 to -15.  
 For TriTap Canadian ballast (120,277,347 volt) change 8 to 6.  
 All units are provided in BZ - dark bronze finish  
 50HZ ballastry is available - Consult factory

### ACCESSORIES - Order Separately


Catalog Number	Description
PBT-1	Photocontrol, button type, 120V
PBT-234	Photocontrol, button type, 208, 240, 277V
PVL3V	Full Cut-off Visor, formed aluminum, bronze finish

### OPTIONS - Add Suffix

Catalog Number	Description
-EM	Double contact socket for remote power (less lamp) all units
-QSS	Quartz restrike system including relay (less lamp) all units (Double contact bayonet socket)
-RS	Hot restrike system, quickly restores main lamp output after power outage. HPS only.

### REPLACEMENT PARTS

Catalog Number	Description
200-0180-9904	Polycarbonate Front
800-3399-0104	Aluminum/Glass Front, bronze (glass conversion)

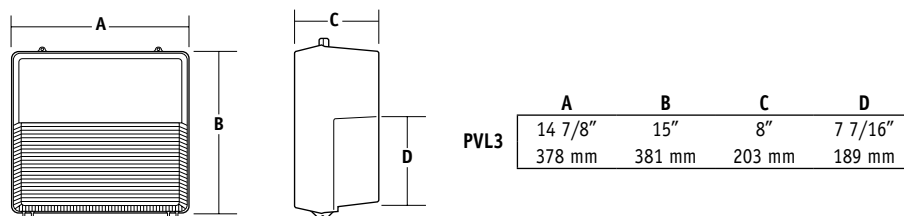

Outdoor Lighting