

RTP Radius Trapezoid

Architectural Wallpack

- Full cut-off, dark sky, neighbor friendly
- Die-cast aluminum housing and door
- Tempered, impact-resistant, clear glass lens
- Energy-saving LED, Pulse Start Metal Halide and Electronic Fluorescent systems
- Five powder coat standard finishes
- Egress options for 120V or 12V remote power (by others)
- HID lamps are medium base
- Three distributions: (see below for restrictions)
 - FT - forward throw for area lighting
 - WT - wide lateral throw for maximum spacing
 - UD - Up/Down accent distribution
- Listed to UL1598 for use in wet locations
- LED color temperature 5000K, 2218 lumens
- CFL lamp color temperature 3500K




WALLPACKS

ORDERING INFORMATION

RTP	-	-	-	-	-	-
SERIES	WATTAGE/SOURCE/VOLTAGE	DISTRIBUTION	FINISH	OPTIONS		
RTP Radius Trapezoid	LED 50L8-5K^{3,6} 47.5w, 120-277V PULSE START METAL HALIDE¹ 50P9 50w, 120/277V 70P8 70w, Quad-Tap® 100P8 100w, Quad-Tap® 150P8 150w, Quad-Tap® CFL¹ 26F8 26w, 120-277V 32F8 32w, 120-277V 42F8 42w, 120-277V 52F8³ 2x26w, 120-277V 64F8³ 2x32w, 120-277V 84F8³ 2x42w, 120-277V	FT² Forward throw WT^{2,3} Wide throw UD Up/down	BZ Bronze BL Black GR Gray WH White PL Platinum	QST⁵ Time delay quartz standby system energizes quartz socket when main lamp does not strike (HID only) EM Double contact bayonet socket only for use with 120V remote power (generator by others) EM12 Two-pin 12V socket for MR11/MR16 lamps (backup power by others) PC(X)⁶ Button photocontrol; Specify voltage 1-120V, 2-208V, 3-240V, 4-277V BOC(X)⁴ 0°C battery backup for one CFL lamp provides 90 minutes backup power, specify 1-120V or 4-277V		

1 Lamp(s) included
 2 IDA approved
 3 LED and 2 lamp CFL units available in WT distribution only
 4 BOC option not available with UD (up/down) distribution
 5 100w D.C. bayonet lamp included
 6 PC is only option for LED
 Color Temperature: CFL lamps 3500K, LED 5000K

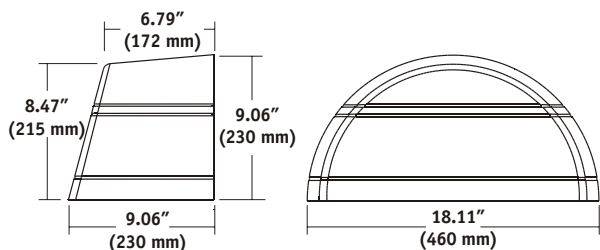

Outdoor Lighting