

FLUORESCENT AFF SERIES

Cat. #		Approvals
Job	Type	



APPLICATIONS

- Uplighting or general floodlighting of signs, facades, security lighting or garden and landscape areas

SPECIFICATIONS

- Extruded aluminum body with cast end caps provides durable protection for lamp and ballast while maintaining a low profile
- Clear polycarbonate lens for lamp protection and excellent light transmission
- 1/2" knuckle mount - 26 watt single knuckle, 32 and 64 watt double knuckle, 42^{13/16}" center-to-center spacing. Wiring on double knuckle units is through the left knuckle when facing unit
- 26 watt lamp is single ended, 4 pin electronic; 32 and 64 watt units are electronic T8 double-ended bi-pin type. Lamps are included
- Ballasts are 120V or 277V electronic with 0° starting temp. 120V is standard
- Bronze powder paint finish

LISTINGS


- Listed to UL1598 for use in wet locations Designed for up-aiming applications



26 WATT

32/64 WATT

(center-to-center
knuckle spacing 42^{13/16}")

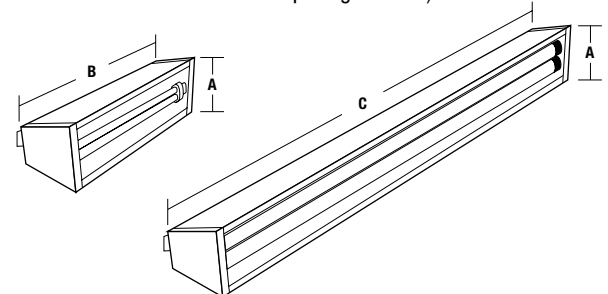

A	B	C
5"	10 ^{3/4} "	49"
127 mm	273 mm	1245 mm



ORDERING INFORMATION

Catalog Number	Wattage	Voltage	1/2" Knuckle	Length	Initial Lumens	Average Lamp Life	Weight lbs. (kg)
AFF-26E-WL	26	120-277	Single	10 3/4"	1,800	10,000	5 (2.3)
AFF-32E-WL	32	120-277	Double	49"	2,850	20,000	18 (8.2)
AFF-64E-WL	64	120-277	Double	49"	5,700	20,000	22 (10)

REPLACEMENT PARTS

Catalog Number	Description
207-5011-0264	Bronze knuckle

PHOTOMETRICS For additional photometric information and IES downloads, visit our web site at www.hubbell-ltg.com

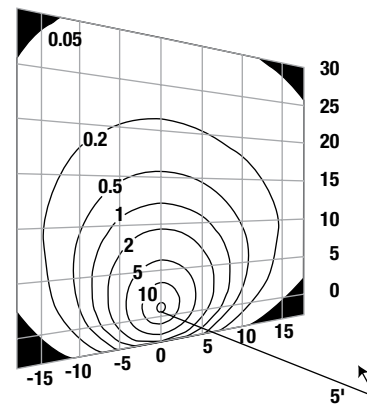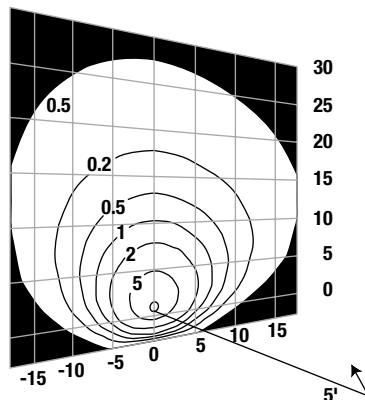

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000
For more information visit our web site: www.hubbelloutdoor.com