

# LARAMIE® LFS SERIES

COMPACT DECORATIVE FLOOD

Cat. #		Approvals
Job	Type	



### Intended Use

- Signs, facades, small area illumination, flag poles and landscape accent. LED fixtures are designed for accent illumination – columns, trees or small flags or signage

### Construction

- Decorative die cast aluminum construction with “Southwest” styling
- Gasketing is silicone for positive seal. Laramie is ruggedly built for wet location applications
- Five standard polyester powder protective finishes plus custom color capability are offered

### Electrical


- Many source/wattage systems available for energy savings with lumen output choices
- Options include factory installed photocontrol and lamp, packaged with luminaire
- LED units offer long life with little maintenance and low energy consumption; Units are offered in NEMA 1, 4 and 5 distributions
- LED units 120-277V, 50/60Hz driver, .5 amp max

### Optics

- Wide beam (7x7) with uniform distribution – great for close setbacks

### Listings

- Listed to UL1598 for use in wet locations

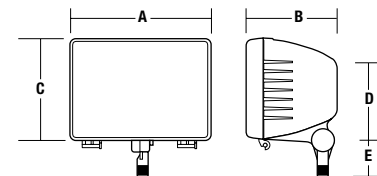

A	B	C	D	E
10 1/4"	6 1/2"	8"	4"	2 1/2"
260 mm	165 mm	203 mm	102 mm	63.5 mm

0.8 sq ft EPA



## ORDERING INFORMATION

ORDERING EXAMPLE: LFS-50P8-BZ-LP

SERIES	WATTAGE/SOURCE	VOLTAGE	FINISH	OPTIONS
LFS Laramie Flood Small	<b>PULSE START METAL HALIDE</b> 50P 50w 70P 70w 100P 100w 150P 150w <b>HIGH PRESSURE SODIUM</b> 50S 50w 70S 70w 100S 100w 150S 150w <b>COMPACT FLUORESCENT<sup>1</sup></b> 26F 26w 32F 32w 42F 42w <b>LED<sup>2</sup></b> 12LU-5K-W 12w, 6x6 12LU-5K-M 12w, 4x4 12LU-5K-N 12w, 1x1	1 120V (H.I.D. reactor) 6 Tri-Tap (H.I.D. only) (120, 277, 347V) 8 <sup>1</sup> Quad - Tap <sup>®</sup> (120, 208, 240, 277V) (standard on CFL) Leave cell blank for LED	BZ Bronze BL Black GR Gray WH White PS Platinum	LP Lamp included (H.I.D. or CFL) P(1) 120V button photocontrol <sup>3</sup> P(2) 208V button photocontrol <sup>3</sup> P(3) 240V button photocontrol <sup>3</sup> P(4) 277V button photocontrol <sup>3</sup> P(6) 347V button photocontrol

### ACCESSORIES - Order Separately, Field Installed

Catalog Number	Description
PBT-1	Button photocontrol 120V
PBT-234	Button photocontrol 208, 240, 277V
NM-BC	Non-metallic box and cover burial box with cable connectors
S-302-M51	2" pipe (2 3/8" O.D.) slip-fitter with 1/2" top hub for LFS/LFP, bronze
S-302-M52	2" pipe (2 3/8" O.D.) slip-fitter with 1/2" top hub for LFS/LFP, white
S-302	2" pipe (2 3/8" O.D.) slip-fitter with 1/2" top hub for LFS/LFP, platinum/gray
S329B	Wet location surface box with cover, (4) side and (1) cover 1/2" hub, nat. alum.
1031-3	Portable spike with 1/2" top hub and 6ft cord set, platinum/gray finish
LFP-JB-BZ	Round pole-side junction box with hardware, 1/2" cover and bottom hub, bronze
LFS-SPC	Polycarbonate shield
LFS-GS	Glare shield, black
MIC-TB	Half yoke wiring box, bronze

### REPLACEMENT PARTS

Catalog Number	Description
93004823	Replacement lens
207-5011-0264	Bronze knuckle

Typical weight: 12 lbs.  
EPA: 0.7 sq.ft.

### PHOTOMETRIC REPORTS

<b>LED WIDE</b>	LFS12LU5KW.IES
<b>LED MEDIUM</b>	LFS12LU5KM.IES
<b>LED NARROW</b>	LFS12LU5KN.IES
<b>150P</b>	HP10971.IES
<b>150S</b>	HP10973.IES
<b>42F</b>	HP10974.IES

1 CFL available in 8 (Quad-Tap<sup>®</sup>) voltage only  
2 LED is 120-277V, 50/60Hz, 5000K, 12.8 input watts  
3 Change "12LU" to 12L1 for 120V, 12L2 for 208V, 12L3 for 240V or 12L4 for 277V

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Outdoor Lighting

Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: [www.hubbell-itg.com](http://www.hubbell-itg.com)