

LARAMIE® LFS SERIES

COMPACT DECORATIVE FLOOD

Cat. #		Approvals
Job	Type	



APPLICATIONS


- Signs, facades, small area illumination, flag poles and landscape accent.

SPECIFICATIONS

- Wide beam (7x7) with uniform distribution – great for close setbacks.
- Decorative die cast aluminum construction with “Southwest” styling. Gasketing is silicone for positive seal. Laramie is ruggedly built for wet location applications.
- Many source/wattage systems available for energy savings with lumen output choices.
- LED units offer long life with little maintenance and low energy consumption. Units are tight beam 2x2 on LN or 3x3 on LW 4x5 on LP, LED fixtures are designed for accent illumination – columns, trees or small flags.
- Five standard polyester powder protective finishes plus custom color capability are offered.
- Options include factory installed photocontrol and lamp, packaged with luminaire.

LISTINGS

- Laramie 175 is CSA certified to UL 1598 for use in wet locations.

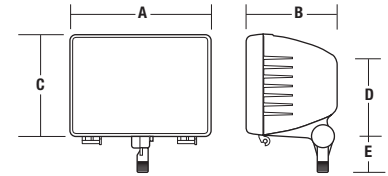


A	B	C	D	E
10 1/4"	6 1/2"	8"	4"	2 1/2"
260 mm	165 mm	203 mm	102 mm	63.5 mm

0.8 sq ft EPA

ORDERING INFORMATION

ORDERING EXAMPLE: LFS-50P8-BZ-LP



SERIES

LFS Laramie® Flood Small

WATTAGE/SOURCE

Pulse Start Metal Halide

50P 50W

70P 70W

100P 100W

150P 150W

HPS

50S 50W

70S 70W

100S 100W

150S 150W

Compact Fluorescent¹

26F 26W

32F 32W

42F 42W

LED^{2,3}

6LW 6W 3x3

12LW 12W 3x3

6LN 6W 2x2

12LN 12W 2x2

6LP 6W 4x5

12LP 12W 4x5

VOLTAGE

1 120V

6 Tri-Tap® (120, 277, 347V)

8 Quad-Tap® (120, 208, 240, 277V)
(standard on
Electronic MH/Fluorescent)

FINISH

BZ Bronze

BL Black

GR Gray

WH White

PS Platinum

OPTIONS

LP Lamp Included

P(1) 120V Button Photocontrol

P(2) 208V Button Photocontrol

P(3) 240V Button Photocontrol

P(4) 277V Button Photocontrol

P(6) 347V Button Photocontrol

ACCESSORIES

(order as separate part #, field installed)

Catalog Number	Description
PBT-1	Button Photocontrol 120V
PBT-234	Button Photocontrol 208, 240, 277V
NM-BC	Non-metallic Box and Cover Burial Box with cable connectors
S-302-M51	2" Pipe (2 3/8" O.D.) Slipfitter with 1/2" top hub, bronze
S-302-M52	2" Pipe (2 3/8" O.D.) Slipfitter with 1/2" top hub, white
S-302	2" Pipe (2 3/8" O.D.) Slipfitter with 1/2" top hub, platinum/gray
S329B	Wet Location Surface Box with cover, (4) side and (1) cover 1/2" hub, natural aluminum
1031-3	Portable Spike with 1/2" top hub and 6' cord set, platinum/gray
LFP-JB-BZ	Round Pole-side Junction Box with hardware, 1/2" cover and bottom hub, bronze
LFS-SPC	Polycarbonate Shield
LFS-GS	Glare Shield, black
MIC-TB	Half yoke wiring box, bronze

¹ Available in 8 (Quad-Tap®) Voltage only.

² Available in 1 (120V) Voltage only.

³ Color temperature: 5000K

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Outdoor Lighting

Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: www.hubbell-ltg.com