


Cat.#		Approvals
Job	Type	

APPLICATIONS

- Full Cutoff, StarView compliant perimeter lighting. Typical mounting height is 15-30 feet.

SPECIFICATIONS

- Decorative die cast aluminum housing and door. Rugged design protects internal components and provides excellent thermal management for long life.
- Flat, tempered, impact resistant clear glass lens protects optics.
- HID units have mogul base socket. Electronic fluorescent units have universal four-pin socket.
- Multi-piece specular reflector produces high performance with wide spread. Pulse Start MH units have vertical mogul socket for maximum lamp output / life and comfort shield for reduced forward brightness. Shield is removable if greater forward throw is desired. HPS has horizontal lamp. Two-lamp CFL are base-up with universal electronic four pin sockets for either 2x32 or 2x26 watt lamps.
- Three-point lag mount to flat surfaces provides rigid mounting. Template provided to ease installation.
- Wiring can be made from recessed junction boxes or 1/2" surface conduit with hubs provided on top and sides.
- Systems include Pulse Start MH, HPS, Metal Halide and two-lamp CFL. CFL unit is available with battery back up for both lamps providing an integral, redundant system for egress applications.
- 800 Series powder paint finishes provide lasting appearance and are available in standard finishes, Dark Bronze, Black, White, Gray and Platinum
- Optional features include EM socket for remote power, QST time delay quartz stand-by, TL Touch latch for tool-free entry and LP lamp included with fixture.

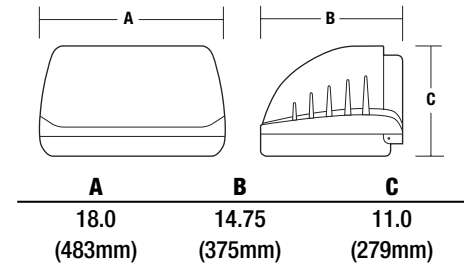


LISTINGS

- All units are CSA certified to UL 1598 for use in wet locations and are IDA compliant



ORDERING INFORMATION

ORDERING EXAMPLE: LLC-320P8-1-PC1



SERIES

LLC Laredo Large Cutoff

WATTAGE/SOURCE/VOLTAGE

PULSE START METAL HALIDE

250P 8	250 watt 120-277V
250P 5	250 watt 480V
250P 6	250 watt Tri-Tap® 120,277,347V
320P 8	320 watt 120-277V
320P 5	320 watt 480V
320P 6	320 watt Tri-Tap® 120,277,347V
320P 6	320 watt 120-277V
350P 5	350 watt 480V
350P 6	350 watt Tri-Tap® 120,277,347V
400P 8	400 watt 120-277V
400P 5	400 watt 480V
400P 6	400 watt Tri-Tap® 120,277,347V

ELECTRONIC FLUORESCENT

64F 8 2x26W/2x32W/120-277V

HIGH PRESSURE SODIUM

250 S 8	250 watt 120-277V
250 S 5	250 watt 480V
250 S 6	250 watt Tri-Tap® 120,277,347V
250 S V	250 watt Five Tap
400 S 8	400 watt 120-277V
400 S 5	400 watt 480V
400 S 6	400 watt Tri-Tap® 120,277,347V
400 S V	400 watt Five Tap

FINISH

1	Bronze
2	Black
3	Gray
4	White
5	Platinum

OPTIONS

PC1¹	Button photocontrol 120V
QST	Time delay quartz standby
EM	DC bayonet socket only (use 150W max. lamp)
TL	Touch Latch
BBUXXX²	Battery back up rated -4°F for one CFL lamp
2BBUXXX²	Battery back up rated -4°F for two CFL lamp
BOCXXX²	Battery back up rated 32°F for one CFL lamp
2BOCXXX²	Battery back up rated 32°F for two CFL lamp
LP	Lamp included with fixture (on CFL specify LP52 or LP64)

¹Suitable for 320watt units max.

²Specify 120 or 277 volt.

ACCESSORIES

LLC-SPC	Polycarbonate shield
PBT-1¹	120V button photocontrol
PBT-234²	208/240/277V button photocontrol
PTA-1	External photocontrol 120V (use for 320 watt and above)
PTA-8	External photocontrol 120-277V (use for 320 watt and above)
PTA-5	External photocontrol 480V (use for 320 watt and above)

¹Suitable for 320watt units max.

²Use only with CFL units.