

LARAMIE LFL

HIGH PERFORMANCE
LARGE AREA FLOODLIGHT

Cat.#		Approvals
Job	Type	



APPLICATIONS


- The new LFL floodlight features both a wide, uniform, high efficiency beam from vertical lamps and three controlled beams with horizontal lamps. The large Laramie lets you put the light right where it is needed.

SPECIFICATIONS


- Durable die cast aluminum housing and door with Southwest styling
- Rigid steel yoke or cast aluminum integral 2 3/8"OD tenon slip-fitter mounting
- Low EPA 2.7 sq. ft. – reduces pole loading and increases retrofit safety
- 1000w systems including metal halide, pulse start metal halide and HPS
- A vertical lamp, segmented optic (155Hx122V) for wide uniform lighting applications, replacing the MVL Magnuliter at more competitive pricing
- Three horizontal beam selections for 1000w MH and 400w systems providing Narrow (102Hx66V), Medium (115Hx108V) and Wide (123Hx123V) distributions.
- Five standard powder coat protective finishes provide lasting appearance: Dark Bronze, Black, Gray, White and Platinum
- Options include: Lamp packed in fixture, Twist-Lock® photocontrol receptacle, Fusing and QST stand-by for 400w and less
- Accessories include: Top visor, Internal louver (horizontal beams), Polycarbonate shield and Mounting adapter/ bracket options

LISTINGS

- Certified to UL1598 for use in wet locations

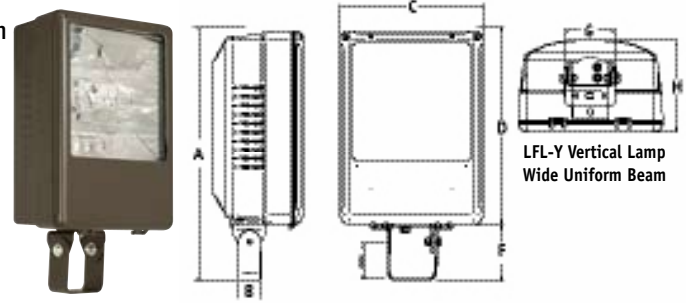

LFL-Y Vertical Lamp
Wide Uniform Beam

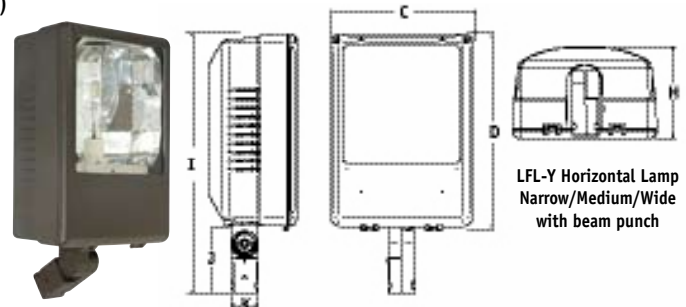

LFL-Y Horizontal Lamp
Narrow/Medium/Wide
with beam punch




EPA 2.7 Sq. Ft.
1000W MH 48lbs.
1000W HPS 56lbs.

A	B	C	D	E	F	G	H	I	J	K
27.90"	2.5"	16.0"	21.75"	4.2"	6.09"	5.5"	10.10"	29.28"	7.5"	3.0"
709 mm	64 mm	406 mm	552 mm	107 mm	155 mm	138 mm	256 mm	744 mm	191 mm	76 mm

ORDERING INFORMATION

ORDERING EXAMPLE: LFL-K320P-VW8-BZ-LP



SERIES

LFL Laramie Flood Large

MOUNT

Y Yoke Mount¹
K Knuckle Mount for
2 3/8" tenon

WATTAGE/SOURCE

METAL HALIDE
1000H^{1,3} 1000W
PULSE START METAL HALIDE
320P 320W
350P 350W
400P 400W
1000P^{1,3} 1000W
HIGH PRESSURE SODIUM
400S 400S
1000S^{1,2,3} 1000S

OPTIC

VW Vertical Wide
HN Horizontal Narrow
HM Horizontal Medium
HW Horizontal Wide

VOLTAGE

8 Quad-Tap®
(120, 208, 240, 277V)
6⁴ Tri-Tap (120, 277, 347V)
5 480V

FINISH

BZ Bronze
BL Black
GR Gray
WH White
PS Platinum

OPTIONS

LP Lamp included
PR(X) Photocontrol receptacle (replace X with voltage: 120, 208, 240, 277, 480, 347) order PTL photocontrol separately
F(X) Fusing (replace X with voltage: 120, 208, 240, 277, 480, 347)
QST Time Delay Quartz

ACCESSORIES - Order Separately

LFL-TVZ Top visor, bronze finish
LFL-IL Internal louver
LFL-SPC Polycarbonate shield
4024C Steel slipfitter for LFL-Y units - mounts over 2 3/8" O.D. pipe or tenon, bronze finish
TWK-11 Steel wall bracket with 2 3/8" O.D. tenon, bronze finish, use with LFL-K units
4040 Heavy-duty steel wall/side wood pole bracket, bronze
4090 Heavy-duty cast iron crossarm adapter for horizontal yoke position, bronze finish

1 1000w fixtures with Yoke includes 3ft 16/350 cord
2 VW optic only
3 Must use ED-37 lamp size
4 For 1000H or 1000P no Tri-Tap is available. Order by specific voltage 120, 277, or 347V