

COMPACT ENTRALUX®

NRG®100 SERIES

Cat. #		Approvals
Job	Type	





APPLICATIONS


- Designed for entryways. Use for new construction or retrofitting. Ideal for safety and security lighting, commercial buildings, restaurants, schools, and motels.

SPECIFICATIONS

- 120V operation to retrofit with HPS or fluorescent sources. Performance refractor reduces glare and directs light towards the ground.
- Refractor is constructed of prismatic polycarbonate for low brightness and uniform distribution. This design reduces glare but also bends the light 15° below horizontal where light is needed most. The ribs on the house side of the refractor reduce the "hot spot" effect, while utilizing all available lumens.
- Housing is one-piece, injection molded, bronze polycarbonate with textured finish. Mounts to recessed 4" outlet boxes. Two-point mount prevents rotation.
- Optics are specifically designed for entryway illumination providing symmetrical light with low glare.
- Available in 50 watt HPS 120V NPF and 28 watt two-pin quad lamp 120 volts. 28 watt starts at -20°F for instant-on colder temperature locations.
- Molded in dark bronze finish.


LISTINGS

- UL 1598 listed and CSA certified for use in wet locations.  

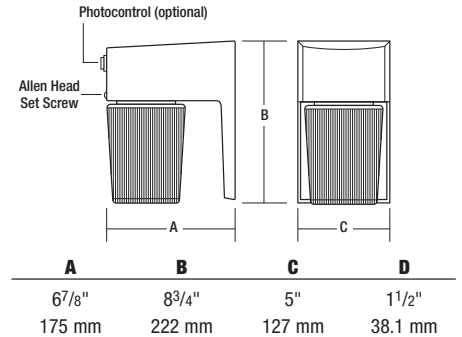

ORDERING INFORMATION

ORDERING EXAMPLE: NRG-121-PC



Catalog Number	Wattage	Voltage	Ballast	Weight
				lbs. kg
NRG-121	50	120	Reactor HPS	4.0 1.8
NRG-128-4W	28	120	Autolag Fluorescent	4.0 1.8

NOTE: Units not available in 277v.
NOTE: Lamps are included (HPS-medium base; 28W two-pin 15mm Quad Tube).

ACCESSORY


(must be ordered separately)

Suffix	Description	Weight
NRG-TC1	Cast Aluminum Surface Conduit Mounting Box with four 1/2" tapped hubs and three plugs; mounting box has a Lektrocote® finish; for use with NRG-12X Series	2.0 lbs 0.9 kg

OPTION

(add appropriate suffix)

Suffix	Description
-PC	Button Type Photocontrol, for NRG-120 Series (factory installed)



PHOTOMETRIC REPORTS

Catalog Number	Report #
NRG121	HP03410.IES

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000
For more information visit our web site: www.hubbell-itg.com