

PERIMETER WALL PACK

NRG®300B SERIES

Cat. #		Approvals
Job	Type	



APPLICATIONS


- Entry or perimeter security lighting applications for commercial buildings, shopping centers, schools, and apartment complexes.

SPECIFICATIONS

- Full polycarbonate front provides vandal resistance and efficient spread. Lateral coverage is 5 times the typical mounting height of 6-10 feet. Molded bronze finish for lasting appearance. Fluorescent photocontrol version available in white.
- Rugged cast aluminum back housing for rigid mounting. Bottom 1/2" conduit knockout for surface conduit wiring. Back hub allows access to recessed wiring boxes. Two point mounting. Additional center-pin torx screws provided for tamper-resistant applications.
- Units available with or without 120V button photocontrol.
- Lamp Included. Vertical medium base socket or universal 4-pin fluorescent.

LISTINGS

- UL 1598 listed for use in wet locations.

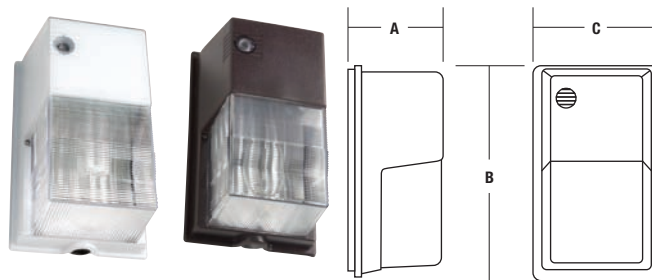

A	B	C
5.39"	11.02"	6.89"
137 mm	280 mm	175 mm

ORDERING INFORMATION

Catalog Number ¹		Wattage	Voltage	Color	Weight	
w/o Photocontrol	w/ Photocontrol				lbs.	kg
HIGH PRESSURE SODIUM						
NRG-301B	NRG-301B-PC	50	120	Bronze	5.0	2.3
NRG-307B	NRG-307B-PC	70	120	Bronze	5.0	2.3
PULSE START METAL HALIDE						
NRG-350B	NRG-350B-PC	50	120		6.5	2.9
ELECTRONIC FLUORESCENT						
N/A	NRG-306B-PCW²	26	120-277	White	4.2	1.9
NRG-306B	NRG-306B-PC²	26	120-277	Bronze	4.2	1.9
N/A	NRG-304B-PCW²	42	120-277	White	4.2	1.9
NRG-304B	NRG-304B-PC	42	120-277	Bronze	4.2	1.9

¹ Lamp included

² Photocontrol units are 120 volt only.

PHOTOMETRIC REPORTS

Catalog Number	Report #
NRG307B	HP10055.IES
NRG304B	

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Outdoor Lighting

Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: www.hubbell-ltg.com