

# WALL OR CEILING MOUNT

NRG®806 LITTLE JEWEL® SERIES

Cat. #		Approvals
Job	Type	



### APPLICATIONS


- Designed for new construction and retrolighting incandescent systems without rewiring. Ideal for outdoor and indoor ceiling and wall lighting applications for schools, apartments, hotels and motels

### SPECIFICATIONS

- Polycarbonate refractor with prismatic interior surface
- One-piece, injection molded, bronze polycarbonate housing. Mounting: outlet box only. Fixture can be installed vertically base up or base down, or horizontally. Mounting hickey included
- Performance is IES Type V distribution. Reflector is aluminum with white Lektrocote® finish
- Ballast is preheat low ambient type. Single ended 13W twin tube (PL) fluorescent lamp is furnished and features excellent color rendition, long lamp life and unmatched energy savings. 32°F starting, 2700K
- Molded in dark bronze housing finish. Refractor is clear prismatic polycarbonate

### LISTINGS

- Listed to UL1598 for use in wet locations

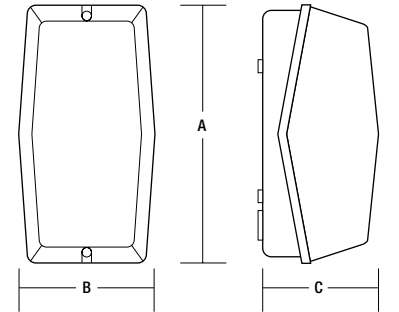


A	B	C
9 11/16"	5"	4 1/2"
246 mm	127 mm	114 mm



## ORDERING INFORMATION

ORDERING EXAMPLE: NRG-806



Catalog Number	Wattage	Voltage	Finish	Weight lbs. (kg)
NRG-806	13	120	Bronze	2 (0.9)

Note: PL-S13 2700k lamp included, GX23 base

Replacement Refractor is 264-0231-9906

## PHOTOMETRIC REPORTS

Catalog Number	Report #
NRG806	HP01897.IES

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000  
For more information visit our web site: [www.hubbelloutdoor.com](http://www.hubbelloutdoor.com)