

PERIMASHIELD® WALLPACK

PGS-B GLASS SERIES

Cat. #		Approvals
Job	Type	



APPLICATIONS


- Ideally suited for security lighting applications as well as commercial and architectural exterior wall and area lighting for parking lots, office building, stores, shopping centers, fast food restaurants, banks, warehouses, and parking garages.

SPECIFICATIONS

- Typical mounting height ranges from 16-25 feet.
- Cast aluminum door frame with clear glass lens. Door seals to housing gasket with twin Hubbell Gard® captive fasteners.
- Die cast aluminum housing allows firm mounting over recessed junction boxes or on flat surfaces for 1/2" surface conduct. Casting dissipates ballast heat for long life. Side hub supplied for field installation of PBT button photo control, ordered separately.
- Specular hammertone main reflector spreads beam and punches forward. Horizontal lamp is tucked behind metal shield.
- PGS-B includes mogul base lamps 250-400 watt HPS or PS. HPS units and metal halide units are HPF. QuadTap®, 347 volt, 480 volt and 50 HZ ballasts available. Consult ordering information.
- Dark bronze powder paint finish standard on frame and housing.

LISTINGS


- CSA certified to UL 1598 for use in wet locations.

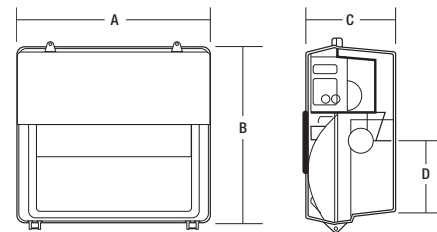

	A	B	C	D
PGS-B	147/8"	15"	97/8"	43/8"
	378 mm	381 mm	251 mm	118 mm

ORDERING INFORMATION

ORDERING EXAMPLE: PGS-B250P-128-1-QSS



CATALOG NUMBER	WATTAGE	VOLTAGE/BALLAST	WEIGHT	
LARGE SIZE			lbs.	kg
HIGH PRESSURE SODIUM				
PGS-B250S-128-1	250	Quad/PLA (HPF)	31	14.1
PGS-B400S-128-1	400	Quad/PLA (HPF)	35	15.9
PULSE START METAL HALIDE				
PGS-B250P-128-1	250	Quad/PS (HPF)	29	13.2
PGS-B350P-128-1	350	Quad/PS (HPF)	32	14.5

Lamp included.

NOTE: Units above are Quad Tap® 120, 208, 240, 277volt.

NOTE: For 480V change 8 to 5

NOTE: For Tri-Tap® (120/277/347V) change 8 to 6

NOTE: 50 Hz 220/240V available

NOTE: Standard finish is dark bronze

ACCESSORIES

(order as separate part #)

Catalog Number	Description
PBT-1	Photocontrol, 120 volt
PBT-234	Photocontrol, 208, 240, 277 volt
PGPS¹	Polycarbonate Shield for refractor
PGWG¹	Wire Guard for refractor
PVL3V	Full Cutoff Visor, formed aluminum, bronze finish

¹ Guard & shield can be used on the same fixture.

OPTIONS

(factory installed, add appropriate suffix)

Catalog Number	Description
-EM	Double Contact Socket for remote power (less lamp) all units
-QSS	Quartz Restrike System including relay (less lamp) all units (double contact bayonet socket)

PHOTOMETRIC REPORTS

Catalog Number	Report #
PGS-B250H-X2X	HP07347.IES
PGS-B250S-X2X	HP07359.IES
PGS-B400H-X2X (350P)	HP07327.IES
PGS-B400S-X2X	HP07316.IES

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Outdoor Lighting

Hubbell Outdoor Lighting • 701 Millennium Drive • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: www.hubbell-ltg.com