

PERIMALITER® WALLPACK

PVL3 POLYCARBONATE SERIES

Cat. #		Approvals
Job	Type	




APPLICATIONS

- Ideally suited for security lighting applications as well as commercial and architectural exterior wall and area lighting for parking lots, office buildings, stores, shopping centers, fast food restaurants, banks, warehouses, and parking garages.

SPECIFICATIONS

- One-piece polycarbonate front with high performance prismatic optics. Secures to housing gasket with twin Hubbell Gard® captive fasteners.
- Die cast aluminum housing allows firm mounting over recessed junction boxes or on flat surfaces for 1/2" surface conduit. Casting dissipates ballast heat for long life. Top hub supplied for field installation of button photocontrol, ordered separately.
- Specular aluminum reflector with kicker panels drive maximum lamp lumens to the refractor prisms. Vertical medium base lamp with these optics provide six-to-one spacing-to-mounting height ratio for maximum spacing or better uniformity. Vertical lamp increases both lamp life and output.
- Available in 70-150 watt HPS and 70-150 watt pulse start metal halide. Various combinations of 120V NPF (HPS only) and QuadTap®, HPF ballasts. 347 volt for Canada and 50 Hz 220/240 volt available. Many listings include medium base lamp for stocking convenience.
- Dark bronze powder paint finish standard on housing, front is painted inside the polycarbonate for lasting appearance.

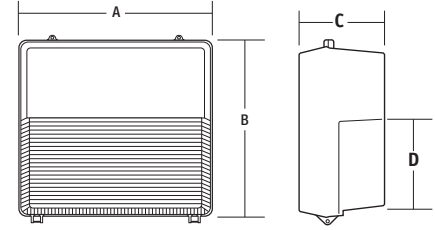

A	B	C	D
147/8"	15"	8"	77/16"
378 mm	381 mm	203 mm	189 mm


LISTINGS

- CSA certified to UL 1598 for use in wet locations.



ORDERING INFORMATION

ORDERING EXAMPLE: PVL3-150P-18-BZ-L



Catalog Number	Wattage	Source	Voltage	Ballast	Lamp Included	Weight	
						lbs.	kg
PULSE START METAL HALIDE							
PVL3-070P-18-BZ-L	70	PS	Quad Tap	HX-HPF	Yes	24	10.9
PVL3-100P-18-BZ-L	100	PS	Quad Tap	HX-HPF	Yes	25	11.3
PVL3-150P-18-BZ-L	150	PS	Quad Tap	HX-HPF	Yes	25	11.3
HIGH PRESSURE SODIUM							
PVL3-070S-18-BZ	70	HPS	Quad Tap	AL-HPF	No	23	10.4
PVL3-070S-18-BZ-L	70	HPS	Quad Tap	AL-HPF	Yes	23	10.4
PVL3-100S-18-BZ	100	HPS	Quad Tap	AL-HPF	No	24	10.9
PVL3-100S-18-BZ-L	100	HPS	Quad Tap	AL-HPF	Yes	24	10.9
PVL3-150S-18-BZ	150	HPS	Quad Tap	AL-HPF	Yes	25	11.3
PVL3-150S-18-BZ-L	150	HPS	Quad Tap	AL-HPF	Yes	25	11.3
PVL3-150S-51-BZ-L	150	HPS	120NPF	HX-HPF	Yes	12	5.4

L Indicates lamp included with the fixture. All units have medium base sockets.
 Above units (-18) are Quad Tap (120,208,240,277V. 480V available on 150w units change 8 to 5.
 For TriTap Canadian ballast (120,277,347V) change 8 to 6.
 All units are provided in BZ - dark bronze finish
 50HZ ballastry is available - Consult factory

ACCESSORIES

(order as separate part #)

Catalog Number	Description
PBT-1	Photocontrol, 120V
PBT-234	Photocontrol, 208, 240, 277V
PVL3V	Full Cutoff Visor, formed aluminum, bronze finish

OPTIONS

(factory installed, add appropriate suffix)

Catalog Number	Description
-EM	Double Contact Socket for remote power (less lamp) all units
-QSS	Quartz Restrike System including relay (less lamp) all units (double contact bayonet socket)
-RS	Hot Restrike System, quickly restores main lamp output after power outage (HPS only)
-L	Lamp included with fixture

PHOTOMETRIC REPORTS

Catalog Number	Report #
PVL3-150S-XX-XX	HP01146.IES
PVL3-150P-XX-XX	HP02412.IES

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Outdoor Lighting

Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: www.hubbell-ltg.com