

QSPC
QUARTER SPHERE
 COMPACT ARCHITECTURAL
 WALLPACK

Cat.#		Approvals
Job	Type	



Intended use:

- QSPC is designed for entry and perimeter lighting from mounting heights of 8-12ft. Use where full cutoff light control is required. Typical applications are commercial, multi-family and high end residential locations. Egress option available on CFL version.

Construction:

- Die cast aluminum housing and door for rugged, yet light weight protection of internal components
- Tempered, impact resistant clear glass lens shields LEDs from weather and bugs
- Micro prism glass lens standard on 70P/42F units for lamp image reduction
- Units are gasket sealed and certified for use in wet locations
- Quick-mount adapter allows easy installation without opening the fixture. Mounts over recessed wall junction boxes. Down aim only.

Electrical:

LED: Input 23.3w drives 13 LEDs for 1184 lumen output. Universal voltage driver is 120-277V, 50/60 Hz. LEDs have nominal 5000K color.
CFL: .4 amp max, 120-277V and 120/277V, CFL lamp color temperature 3500K
HID: 1.9 amp max, 120-277V

Listings:

- Listed to UL1598 for use in wet locations, No uplight generated, IDA approved


*In Canada, certified for 120-240V



QSPC LED



QSPC HID/CFL

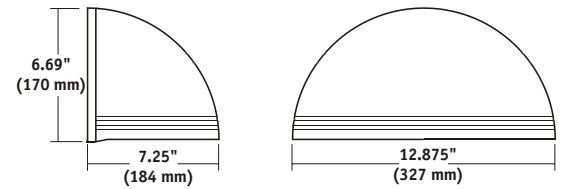

ORDERING INFORMATION

ORDERING EXAMPLE: QSPC-42F9-BZ-BOC

[] Series	-	[] Wattage/Source/Voltage	-	[] Finish	-	[] Options
SERIES		WATTAGE/SOURCE/VOLTAGE		FINISH		OPTIONS
QSPC Quarter Sphere Compact		Pulse Start 70P8 70w PS Quad-Tap® CFL¹ 42F8 42w CFL Quad-Tap® 42F9² 42w CFL 120/277V LED 13LU-5K² 13 LEDs, 23.3w, 120-277V 50,000 hrs life		BZ Bronze PL Platinum		BOC² 0°C battery backup for CFL lamp provides 90 minutes backup power. Option only available on 42F9 version.

¹ CFL lamps are 4-pin, 3500k

² Available in BZ finish only