

# RTP RADIUS TRAPEZOID

ARCHITECTURAL WALLPACK

Cat.#		Approvals
Job	Type	



## APPLICATIONS


- Architectural wallpack stylish Radius trapezoid shape with molded lines to accentuate building architecture. Provides excellent illumination in three distributions as well as safety with Egress option

## SPECIFICATIONS

- Full cut-off, dark sky, neighbor friendly
- Die cast aluminum housing and door
- Tempered, impact-resistant, clear glass lens
- Energy-saving LED, Pulse Start Metal Halide and Electronic Fluorescent systems
- Three distributions: (see below for restrictions) FT - forward throw for area lighting, WT - wide lateral throw for maximum spacing and UD - Up/Down accent distribution
- Five powder coat standard finishes
- Egress options for 120V or 12V remote power (by others)
- LED color temperature 5000K
- LED produces 2218 lumens
- CFL lamps color temperature 3500K
- HID lamps are medium base


## LISTINGS

- UL 1598 listed for use in wet locations

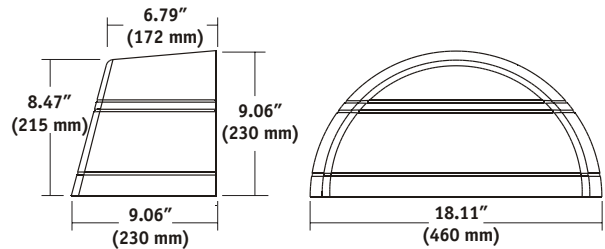

## ORDERING INFORMATION

ORDERING EXAMPLE: RTP-150P8-FT-WH-EM



SERIES	WATTAGE/SOURCE/VOLTAGE	DISTRIBUTION	FINISH	OPTIONS
<b>RTP</b> Radius Trapezoid	<b>LED</b>	<b>FT</b> Forward Throw <sup>2</sup>	<b>BZ</b> Bronze	<b>QST</b> <sup>3</sup> Time delay quartz standby system energizes quartz socket when main lamp does not strike (HID only)
	<b>50L8-5K</b> <sup>3,6</sup> 47.5w LED 120-277V	<b>WT</b> Wide Throw <sup>2</sup>	<b>BL</b> Black	<b>EM</b> Double contact bayonet socket only for use with 120V remote power (generator by others)
	<b>Pulse Start</b> <sup>1</sup>	<b>UD</b> Up/Down	<b>GR</b> Gray	<b>EM12</b> Two-pin 12V socket for MR11/MR16 lamps (backup power by others)
	<b>150P8</b> 150w PS Quad		<b>WH</b> White	<b>PC(X)</b> Button photocontrol. Specify voltage 1-120V, 2-208V, 3-240V, 4-277V
	<b>100P8</b> 100w PS Quad		<b>PL</b> Platinum	<b>BOC(X)</b> 0°C battery backup for one CFL lamp provides 90 minutes backup power specify 1-120V or 4-277V
	<b>70P8</b> 70w PS Quad			
	<b>50P9</b> 50w PS 120/277V			
	<b>CFL</b> <sup>1</sup>			
	<b>26F8</b> 42 CFL Quad			
	<b>32F8</b> 32 CFL Quad			
	<b>42F8</b> 42 CFL Quad			
	<b>52F8</b> <sup>3</sup> 2x26 CFL Quad			
	<b>64F8</b> <sup>3</sup> 2x32 CFL Quad			
	<b>84F8</b> <sup>3</sup> 2x42 CFL Quad			

1 Lamp(s) included, all units are Quad-Tap® (120/208/240/277V)

2 IDA approved

3 Available in WT distribution only

4 BOC option not available with UD, up/down distribution

5 100w D.C. bayonet lamp included

6 PC is only option

Color Temperature: CFL lamps 3500K, LED 5000K