

Cat. #		Approvals
Job	Type	



APPLICATIONS


- Wall mount security illumination. Very energy efficient lighting with excellent life. Narrow LPS wave length is safe for sea turtles and for use near observatories. LPS output excellent in fog locations.

SPECIFICATIONS

- Cast aluminum housing with four slots and 1" wiring hole for mounting over outlet box.
- Molded, one-piece polycarbonate lens and cover, completely gasketed and secured with two screws.
- Formed, aluminum reflector provides forward throw light pattern.
- Lamp and lamp support device INCLUDED.
- Enclosed sockets, with nickel-plated brass contact for single-ended, bayonet base LPS lamp.
- HR type ballast, HPF, starting rated at -20°F.

LISTINGS


- UL listed and CSA certified for wet locations.

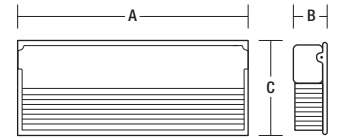

A	B	C	WEIGHT
20 ¹³ / ₃₂ "	3 ¹ / ₂ "	8 ⁵ / ₈ "	15 lbs
518 mm	89 mm	219 mm	6.8 kg

ORDERING INFORMATION

ORDERING EXAMPLE: SD-L55P-240-DB-W1-P1



SERIES	
SD	Scottsdale LPS Series

LAMP TYPE/WATTAGE	
L03P	(T-17 35 watt) polycarbonate
L55P	(T-17 55 watt) polycarbonate

VOLTAGE	
120	120V
208	208V
240	240V
277	277V
347	347V
480	480V

COLOR	
DB	Dark Bronze

WIRING	
W(X)'	Prewired Voltage

BUTTON PHOTOCONTROL OPTION	
P(X)'	Button Photocontrol specify voltage (480V N/A)

PHOTOMETRIC REPORTS

Catalog Number	Report #
SD-L03	L3617SD
SD-L55	L3616SD

¹ Specify voltage: 1 - 120V, 2 - 208V, 3 - 240V, 4 - 277V, 5 - 480V, 6 - 347V.

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000
For more information visit our web site: www.hubbell-ltg.com