

# CEILING RECESSED

SOFFITIER SERIES

Cat. #		Approvals
Job	Type	



### APPLICATIONS


- Canopies, soffits, parking garages, and facades.

### SPECIFICATIONS

- Aluminum lens frame with prismatic, flat glass lens, fully gasketed to housing. Hinged frame secured with captive screw. Optional drop prismatic acrylic, or drop prismatic polycarbonate lenses. Diffused, anodized aluminum reflectors for horizontal or vertical lamp, provides asymmetric or symmetric light pattern, respectively.
- Square, formed galvanized steel housing with integral trim flange. Recessed mount provided with adjustable aluminum brackets. Designed for 1/4" to 3/4" thick ceiling with 14 1/4" square, rough opening. Thermal protector included.
- Formed aluminum reflector provides uniform lighting.
- Medium porcelain socket, pulse rated, with spring-loaded, nickel-plated center contact and reinforced lamp grip screw shell. CWA type ballast, HPF, starting rated at -20°F (-40°F for HPS).
- Trim and door finished in white powder paint.

### LISTINGS

- UL and cUL 1598 listed for damp locations.

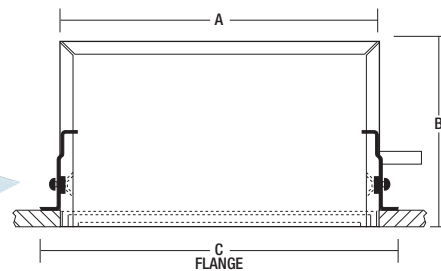


A	B	C	Weight
13 <sup>13</sup> / <sub>16</sub> "	8"	16 <sup>5</sup> / <sub>8</sub> "	34 lbs
351 mm	203 mm	422 mm	15.4 kg

### PHOTOMETRIC REPORT

Catalog Number	Report #
STCM-P10-HLAS-FGP-X-WT	L4035ST

### ORDERING INFORMATION

ORDERING EXAMPLE: ST-P15-VLSY-FGP-Q-WH-F1

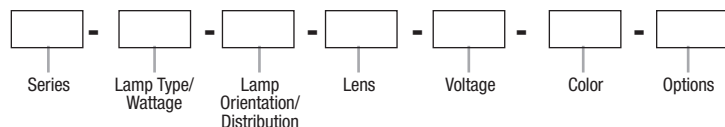

#### SERIES

<b>ST</b>	Soffitier
-----------	-----------

#### SOURCE/WATTAGE

PULSE START METAL HALIDE	
<b>P70</b>	70 watt (ED-17)
<b>P10</b>	100 watt (ED-17)
<b>P12</b>	125 watt (ED-17)
<b>P15</b>	150 watt (ED-17)
<b>P17<sup>1</sup></b>	175 watt (ED-17)
HIGH PRESSURE SODIUM	
<b>S70</b>	70 watt (ED-17)
<b>S10</b>	100 watt (ED-17)
<b>S15</b>	150 watt (ED-17)
FLUORESCENT <sup>3</sup>	
<b>F84</b>	2x42 PLT

#### LAMP ORIENTATION/DISTRIBUTION

<b>HLAS</b>	Horizontal - Asymmetric
<b>VLSY</b>	Vertical - Symmetric

#### LENS

<b>FGP*</b>	Flat Glass (prismatic)
<b>DA</b>	Drop Acrylic
<b>DP</b>	Drop Polycarbonate

#### VOLTAGE

<b>Q<sup>2</sup></b>	Quad-Tap® (120/208/240/277V)
<b>T<sup>2,4</sup></b>	Tri-Tap® (120/277/347V)

#### COLOR

<b>WH</b>	White
-----------	-------

#### OPTIONS

<b>F1</b>	Fusing - 120V
<b>F2</b>	Fusing - 208V
<b>F3</b>	Fusing - 240V
<b>F4</b>	Fusing - 277V
<b>F5</b>	Fusing - 480V
<b>F6</b>	Fusing - 347V
<b>QZ</b>	Quartz RS with lmap
<b>L</b>	Lamp

1 Vertical lamp orientation only.  
 2 Factory wired for highest voltage unless specified.  
 3 Horizontal design only. Must specify wire voltage 120 or 277 for thermal protector on fluorescent units.  
 4 Not available on F84 unit

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Outdoor Lighting

Hubbell Industrial Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: [www.hubbell-ltg.com](http://www.hubbell-ltg.com)