

# TRP TRAPEZOID

ARCHITECTURAL WALLPACK

|       |      |           |
|-------|------|-----------|
| Cat.# |      | Approvals |
| Job   | Type |           |



### APPLICATIONS


- Architectural wallpack stylish Trapezoid shape with molded lines to accentuate building architecture. Provides excellent illumination in two distributions as well as safety with Egress option

### SPECIFICATIONS

- Full cut-off, dark sky, neighbor friendly
- Die cast aluminum housing and door
- Tempered, impact-resistant, clear glass lens
- Energy-saving LED, Pulse Start Metal Halide and Electronic Fluorescent systems
- Two distributions: (see below for restrictions)
- FT - forward throw for area lighting WT - wide lateral throw for maximum spacing
- Five powder coat standard finishes.
- Egress options for 120V or 12V remote power (by others)
- LED color temperature 5000K
- LED produces 2218 lumens
- CFL lamps color temperature 3500K
- HID lamps are medium base


### LISTINGS

- UL 1598 listed for use in wet locations

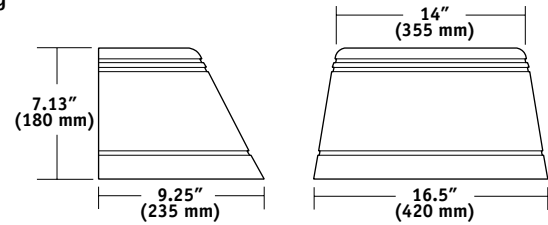

## ORDERING INFORMATION

ORDERING EXAMPLE: TRP-150P8-FT-BZ-EM



| SERIES               | WATTAGE/SOURCE/VOLTAGE                           | DISTRIBUTION                      | FINISH             | OPTIONS  |
|----------------------|--|-----------------------------------|--------------------|--|
| <b>TRP</b> Trapezoid | <b>LED</b>                                       | <b>FT</b> Forward Throw           | <b>BZ</b> Bronze   | <b>QST</b> <sup>3</sup> Time delay quartz standby system energizes quartz socket when main lamp does not strike (HID only) |
|                      | <b>50L8-5K</b> <sup>2,4</sup> 47.5w LED 120-277V | <b>WT</b> Wide Throw <sup>2</sup> | <b>BL</b> Black    | <b>EM</b> Double contact bayonet socket only for use with 120V remote power (generator by others)                          |
|                      | <b>Pulse Start</b> <sup>1</sup>                  |                                   | <b>GR</b> Gray     | <b>EM12</b> Two-pin 12V socket for MR11/MR16 lamps (backup power by others)  |
|                      | <b>150P8</b> 150w PS Quad                        |                                   | <b>WH</b> White    | <b>PC(X)</b> Button photocontrol. Specify voltage 1-120V, 2-208V, 3-240V, 4-277V   |
|                      | <b>100P8</b> 100w PS Quad                        |                                   | <b>PL</b> Platinum | <b>BOC(X)</b> 0°C battery backup for one CFL lamp provides 90 minutes backup power specify 1-120V or 4-277V                |
|                      | <b>70P8</b> 70w PS Quad                          |                                   |                    |  |
|                      | <b>50P9</b> 50w PS 120/277V                      |                                   |                    |  |
|                      | <b>CFL</b> <sup>1</sup>                          |                                   |                    |  |
|                      | <b>26F8</b> 42 CFL Quad                          |                                   |                    |  |
|                      | <b>32F8</b> 32 CFL Quad                          |                                   |                    |  |
|                      | <b>42F8</b> 42 CFL Quad                          |                                   |                    |  |
|                      | <b>52F8</b> <sup>2</sup> 2x26 CFL Quad           |                                   |                    |  |
|                      | <b>64F8</b> <sup>2</sup> 2x32 CFL Quad           |                                   |                    |  |
|                      | <b>84F8</b> <sup>2</sup> 2x42 CFL Quad           |                                   |                    |  |

1 Lamp(s) included, all units are Quad-Tap® (120/208/240/277V)

2 Available in WT distribution only

3 100w D.C. bayonet lamp included

4 PC is only option

Color Temperature: CFL lamps 3500K, LED 5000K