

VAPORTITE VBGG/VWGG INCANDESCENT

Cat. #		Approvals
Job	Type	



APPLICATIONS

- Wall/Ceiling/Pendant entry, corridor, tunnel, service area, stairwell, or retro-accent

SPECIFICATIONS

- 150 watt/300 watt maximum medium base incandescent.
- Platinum silver protective finish
- VWGG has cast aluminum wall bracket with cast wiring box. Box has external lugs and four side 1/2" hubs for surface conduit and one rear 1/2" access hub
- VBGG has cast aluminum wiring box with external lugs for ceiling mount and four 1/2" hubs for surface conduit. Wiring box has top 1/2" hub for pendant mount
- All units have water/bug tight gasketing
- All units have medium base porcelain socket
- All units include clear glass protective globe with thread-on cast aluminum guard. Guard includes vandal-resistant set screw


LISTINGS

- All units listed to UL1598 for use in wet locations




150 WATT

Lugs: 5" center to center

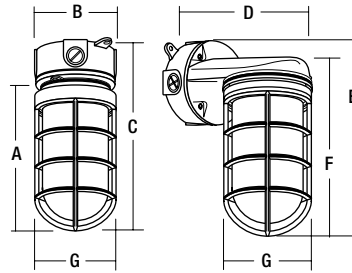

300 WATT

Lugs: 5" center to center

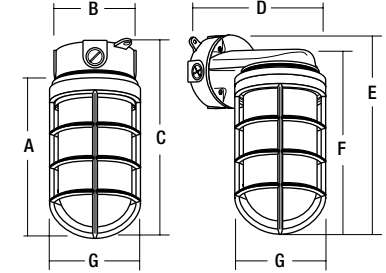

	A	B	C	D	E	F	G
150W	7"	4 1/2"	9"	7 1/4"	9 3/4"	8 1/2"	4"
	178 mm	114 mm	229 mm	184 mm	248 mm	216 mm	102 mm
300W	9"	4 1/2"	11"	8"	11"	9"	5 1/2"
	229 mm	114 mm	279 mm	203 mm	279 mm	229 mm	140 mm



ORDERING INFORMATION

Catalog Number	Wattage	Mounting	Weight lbs. (kg)
VBGG-150	150	Box/pendant	3 (1.36)
VWGG-150	150	Wall	3.5 (1.59)
VBGG-300	300	Box/pendant	4 (1.81)
VWGG-300	300	Wall	4.5 (2.04)

REPLACEMENT GLOBES

Catalog Number	Description
VG-15	150w
VG-30	300w

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Outdoor Lighting

Hubbell Industrial Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: www.hubbelloutdoor.com