

WM SERIES

COMPACT
WALL SCONCE

Cat. #		Approvals
Job	Type	



APPLICATIONS


- Accent wall sconces for mounting heights on 8-12 ft.

SPECIFICATIONS

- Shipped as full cutoff downlight
 - Units have an internal shield that when removed allows up/down distribution
- UV stabilized polycarbonate front is decorative yet rugged.
- Die cast housing provides rigid mounting and dissipates ballast/lamp heat.
- Silicone gasket seals out moisture and insects.
- Fluorescent units feature 120V photocontrol for dusk to dawn energy saving control.
- 70 watt pulse start units have Tri-Tap® ballast (120, 277, 347V) and are shipped less photocontrol. PBT-1 or PBT-234 may be field installed if photocontrol is desired.
- All units include lamp(s).

LISTINGS

- All units are UL 1598 listed for USA and Canada.

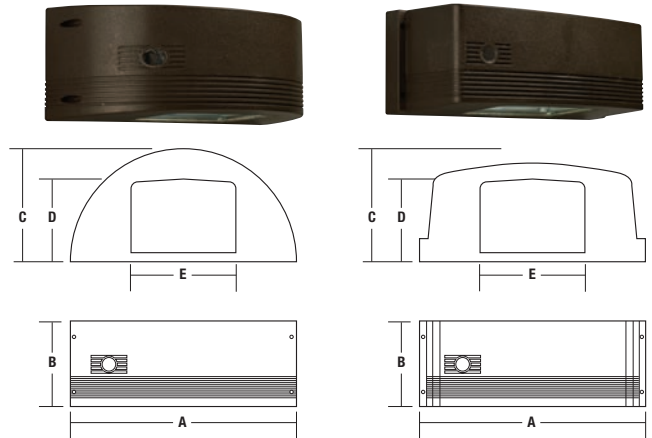

	A	B	C	D	E
WMR	14 ⁵ / ₈ "	5 ¹ / ₂ "	7 ⁵ / ₁₆ "	4 ¹³ / ₁₆ "	6 ¹¹ / ₁₆ "
	370 mm	140 mm	185 mm	121 mm	170 mm
WMS	14 ⁵ / ₈ "	5 ¹ / ₂ "	6 ⁵ / ₁₆ "	4 ¹³ / ₁₆ "	6 ¹¹ / ₁₆ "
	370 mm	140 mm	160 mm	121 mm	170 mm

ORDERING INFORMATION

Catalog Number ¹	Shape	Wattage	Voltage	Photocontrol	Weight	
					lbs	(kg)
Radius Style						
WMR-213F1-PC	Radius	2X13 FLU	120	Yes	6.5	2.9
WMR-42F1-PC	Radius	42 FLU	120	Yes	6.0	(2.7)
WMR-70P6	Radius	70 PS	120, 277, 347	No	11.0	(5.0)
Soft Square Style						
WMS-213F1-PC	Square	2X13 FLU	120	Yes	6.5	(2.9)
WMS-42F1-PC	Square	42 FLU	120	Yes	6.0	(2.7)
WMS-70P6	Square	70 PS	120, 277, 347	No	11.0	(5.0)

¹ All units have molded-in dark bronze finish and include lamps.

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Outdoor Lighting

Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: www.hubbell-ltg.com