

LARAMIE PAR

ADJUSTABLE LAMP(S) PAR
MH FLOOD

Features

The LFP Laramie PAR flood features one or two adjustable sockets that allow independent aiming of the lamp. Driven by electronic metal halide ballast(s) and using powerful compact sources, LFP can accent targets 30 to 50 feet away with either uniform flood or concentrated spot beams.

A single two-lamp, 78 watt unit with spot lamps can be aimed to two adjacent flagpoles from a central location. The new LFP-JB cast-wiring box can be mounted to existing flagpoles by a simple ingenious method that allows installation from 6 to 12 feet, depending on concern for vandalism.

For extra protection, the LFS-SPC polycarbonate shield protects the tempered glass lens and for deep shielding, the LFS-GS black glare shield surrounds the lens for the ultimate in spill control.

Compact, stylish, and versatile – Laramie PAR!

CSA certified to UL 1598, suitable for use in wet locations.




Ordering Information Example: LFP - 2 - 40H1 - BZ - LPFL-P(1)

| Series | # Lamps | Wattage/Source Voltage | Finish | Options |
|--|---------|------------------------|---|--|
| Series LFP Laramie Flood PAR | | | Finish BZ Bronze BL Black GR Gray WH White PS Platinum | Options (factory supplied, packed w/ fixture) Lamps Included -LPFL PAR floods (23-30degree) -LPSP PAR spots (10-15 degree) -P(1) 120V button photocontrol -P(4) 277V button photocontrol (39W/78W only) |
| Number of Lamps 1 One lamp 2 Two lamps | | | | |
| Wattage/Source/Voltage 20H1 120V 40H1 120V 39H9 120/277V 78H9 120/277V | | | | |


Accessories - Order Separately, Field Installed

| Catalog Number | Description |
|----------------|---|
| LFS-SPC | Polycarbonate shield |
| LFS-GS | Glare shield, black |
| LFP-JB-XX | Pole mount cast junction box (specify finish) |
| PBT-1 | Button photocontrol 120V |
| PBT-234 | Button photocontrol 208, 240, 277V |



LFP-JB

Dimensions

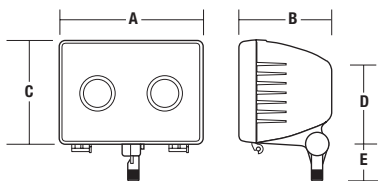

| | A | B | C | D | E |
|-----|--------|--------|--------|--------|------|
| LFP | 10.25" | 6.5" | 8" | 4" | 2.5" |
| | 260 mm | 165 mm | 203 mm | 102 mm | 63.5 |