

NRG[®] 1100

FULL CUTOFF COMPACT WALLPACK

Features

Hubbell Outdoor Lighting's newest NRG[®] family to be introduced late in the second quarter 2007 is packed with owner benefits. The StarView compliant optics allow no up light, saving energy and keeping the neighbors happy!

Use for wall perimeter or entry at mounting heights of 8-15 feet. The decorative styling is also rugged with one piece polycarbonate front, painted bronze or white on the inside, that resists rocks and other small projectiles. The die cast housing provides rigid mounting, conduit and photocontrol hubs, easy mount design and heat dissipation.



StarView[™]
compliant



Ordering Information


| Catalog Number ¹ | Wattage/Volts | Finish | Weight lbs. (kg) |
|---------------------------------|------------------------|--------|------------------|
| Pulse Start Metal Halide | | | |
| NRG-1111B | 100 PS 120, 277, 347 | bronze | 12 (5.4) |
| NRG-1111W | 100 PS 120, 277, 347 | white | 12 (5.4) |
| NRG-1171B | 70 PS 120, 277, 347 | bronze | 11 (5.0) |
| NRG-1171W | 70 PS 120, 277, 347 | white | 11 (5.0) |
| NRG-1151B | 50 PS 120, 277 | bronze | 9 (4.1) |
| NRG-1151W | 50 PS 120, 277 | white | 9 (4.1) |
| High Pressure Sodium | | | |
| NRG-1112B | 100 PS 120, 277, 347 | bronze | 10 (4.5) |
| NRG-1112W | 100 PS 120, 277, 347 | white | 10 (4.5) |
| NRG-1172B | 70 PS 120, 277, 347 | bronze | 9 (4.1) |
| NRG-1172W | 70 PS 120, 277, 347 | white | 9 (4.1) |
| Electronic Fluorescent | | | |
| NRG-1143B | 42 CFL 120-277 60/50hz | bronze | 7 (3) |
| NRG-1143W | 42 CFL 120-277 60/50hz | white | 7 (3) |

¹ All fixtures include medium base or compact fluorescent lamps. Fluorescent units use universal socket and are capable of operating 26 or 32-watt PLT lamps if substituted in the field.

Accessories - Order Separately

| Catalog Number | Description |
|----------------|---------------------------------|
| PBT-1 | Photocontrol, button type, 120V |
| PBT-234 | Photocontrol, button type, 277V |

Dimensions

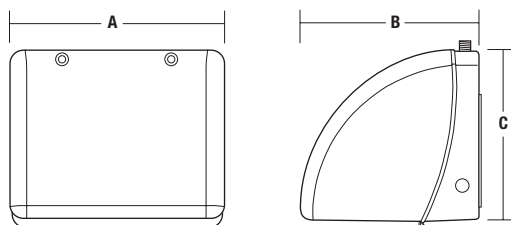

| A | B | C | D |
|--------|--------|--------|--------|
| 7 1/4" | 7" | 5 1/2" | 2 3/8" |
| 184 mm | 178 mm | 140 mm | 60 mm |



Outdoor Lighting