

Features

- Clear borosilicate glass lens allows shielded lamp to direct main beam downwards. Cast aluminum door supports glass, seals to housing gasket with twin HubbellGard® fasteners. Door is hinged, can be easily removed.
- Cast aluminum back housing. Mounts over recess wiring boxes or allows feed-thru wiring through 1/2" side hubs. Side hub provided for field installation of photocontrol. PGS-B has deeper housing to handle 400 watt ballast sizes.
- Shielded lamp above a specular hammertone reflector provides beam control, socket is adjustable for deeper shielding.
- Dark bronze powder paint finish is standard, other finishes available, consult factory.
- Lamp included.
- CSA certified to UL 1598 for use in wet locations.



Ordering Information

Catalog Number	Wattage	Voltage/Ballast	Weight lbs. (kg)
Medium Size - Medium Base Socket			
High Pressure Sodium			
PGS-A070S-128-1	70	Quad/AL (HPF)	18 (8.2)
PGS-A100S-128-1	100	Quad/AL (HPF)	18 (8.2)
PGS-A150S-128-1	150	Quad/AL (HPF)	18 (8.2)
Metal Halide			
PGS-A070H-128-1	70	Quad/AL (HPF)	22 (10)
PGS-A100H-128-1	100	Quad/PLA (HPF)	22 (10)
PGS-A175H-128-1	175	Quad/PLA (HPF)	23 (10.4)
Large Size - Mogul Base Socket			
High Pressure Sodium			
PGS-B250S-128-1	250	Quad/PLA (HPF)	31 (14.1)
PGS-B400S-128-1	400	Quad/PLA (HPF)	35 (15.9)
Metal Halide			
PGS-B250H-128-1	250	Quad/PLA (HPF)	29 (13.1)
PGS-B400H-128-1	400	Quad/PLA (HPF)	32 (14.5)

Note Units are Quad-Tap®. For Tri-Tap® (120/277/347V) change 8 to 6. For 480V change 8 to 5. Standard finish is dark bronze. For 50Hz ballastry, consult factory. Note 50Hz 220/240V available, CWI ballasts available on 400W.

Options - Add Suffix

Catalog Number	Description
-EM	Double contact socket for remote power (less lamp) all units
-QSS	Quartz restrike system including relay (less lamp) all units (Double contact bayonet socket)
-RS	Hot restrike system, quickly restores main lamp output after power outage. HPS only.

Accessories - Order Separately

Catalog Number	Description
PBT-1	Photocontrol, 120V
PBT-234	Photocontrol, 208, 240, 277V
PGPS ¹	Polycarbonate shield for refractor
PGWG ¹	Wire guard for reflector
PVLV	Full Cutoff Visor, formed alum., bronze finish


1 Guard and shield can be used on the same fixture.

Replacement Part

Catalog Number	Description
800-3398-0104	Lens Door, bronze

Dimensions

PGS-A/PGS-B

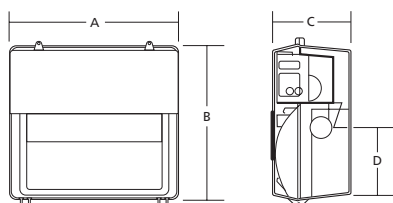

	A	B	C	D
PGS-A	14 7/8"	15"	7 3/16"	4 3/8"
	378 mm	381 mm	183 mm	111 mm
PGS-B	14 7/8"	15"	9 7/8"	4 3/8"
	378 mm	381 mm	251 mm	111 mm

