


UCL-SM

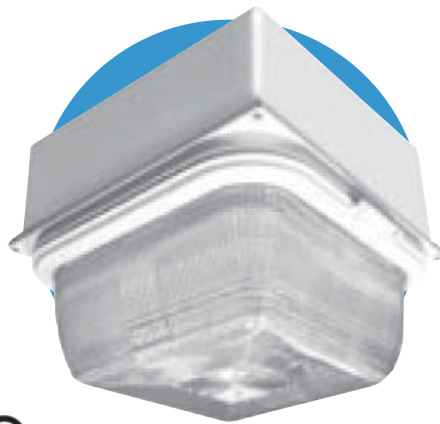

Features

- Rugged cast aluminum construction designed for rigid mounting and long life – two 1/2" side hubs provided for surface conduit.
- Tool-free entry with spring-loaded touch latch allows easy maintenance, re-lamping from the ground with lamp stick.
- Borosilicate non-yellowing glass refractor provides high performance, uniform light distribution.
- Vertical lamp is included and provides maximum output and life.
- High angle illumination allows better vision on vertical tasks in parking garages, storage, car wash bays, etc.
- Internal quick-connect simplifies wiring of optical assembly, easing installation.
- Protective white or bronze 800 Series powder paint provides lasting appearance.
- Silicone gasketing seals optical assembly.
- CSA certified to UL 1598 for use in wet locations.

Ordering Information

Catalog Number ¹	Wattage/Source	Voltage	Finish	Weight lbs. (kg)
UCLSM175H8	175/MH	120, 208, 240, 277	White	28 (12.7)
UCLSM175H8-1	175/MH	120, 208, 240, 277	Bronze	28 (12.7)
UCLSM250H8	250/MH	120, 208, 240, 277	White	30 (13.6)
UCLSM250H8-1	250/MH	120, 208, 240, 277	Bronze	30 (13.6)
UCLSM250P8	250/PS	120, 208, 240, 277	White	30 (13.6)
UCLSM250P8-1	250/PS	120, 208, 240, 277	Bronze	30 (13.6)
UCLSM320P8	320/PS	120, 208, 240, 277	White	34 (15.4)
UCLSM320P8-1	320/PS	120, 208, 240, 277	Bronze	34 (15.4)
UCLSM400H8	400/MH	120, 208, 240, 277	White	36 (16.3)
UCLSM400H8-1	400/MH	120, 208, 240, 277	Bronze	36 (16.3)
UCLSM400P8	400/PS	120, 208, 240, 277	White	36 (16.3)
UCLSM400P8-1	400/PS	120, 208, 240, 277	Bronze	36 (16.3)

1 Lamp included. (ED28 size)


Accessories - Order Separately

Catalog Number	Description
UCL-HS	Internal House Side Shield: one shield 190°, order 2 for 290° or 360°
UCL-LC	ED28 Lamp Changer with three 5 foot sections

Replacement Part

Catalog Number	Description
264-0387-9904	Glass Refractor only

Dimensions



A	B	C
14 1/4" sq.	5"	6 1/8"
362 mm	127 mm	156 mm