

# LAREDO SERIES

LCC SERIES

|       |      |           |
|-------|------|-----------|
| Cat.# |      | Approvals |
| Job   | Type |           |




### APPLICATIONS

Full cutoff, StarView compliant entry or perimeter lighting. Six to twelve foot typical mounting heights.

### SPECIFICATIONS

- Decorative die cast aluminum housing and door. Rugged design protects internal components and provides excellent thermal management for long life.
- Flat, tempered, impact resistant glass lens protects optics. Clear on Pulse Start, CFL and HPS units, pattern on LED unit.
- HID units are medium base; CFL units have insert and twist electronic socket. Lamps are optional.
- Two-point lag mount securely holds housing to surface. Mounting template is provided.
- Designed for mounting over standard recessed junction boxes or for wiring with surface conduit. 1/2" hubs with plugs provided on top and sides for versatile access.
- Systems include Pulse Start 50-70w, CFL 26-32-42w, HPS 50-70watt and LED 12watt. 50,000 hour typical life.
- 800 Series powder paint finishes provide lasting appearance and are available in standard finishes Dark Bronze, Black, White, Gray and Platinum.
- Optional socket available for remote power for power outage egress applications.
- All units are CSA certified to UL 1598 for use in wet locations and are StarView compliant

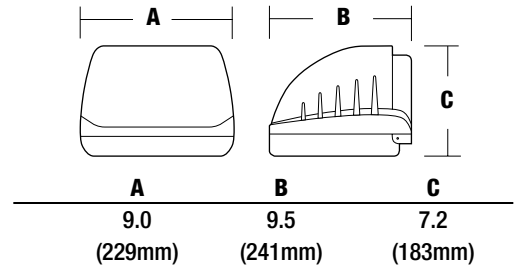

### ORDERING INFORMATION

#### ORDERING EXAMPLE

**LCC** | **70P8** | **1** | **LP**  
Series | Wattage/Source/Voltage | Finish | Options

#### SERIES

**LCC** Laredo Compact Cutoff

#### WATTAGE/SOURCE/VOLTAGE

##### ELECTRONIC FLUORESCENT

**26 F 8** 26watt 120-277

**32 F 8** 32watt 120-277

**42 F 8** 42watt 120-277

##### PULSE START MH

**50 P 8** 50watt 120-277

**70 P 8** 70watt 120-277

##### HPS

**50 S 1** 50watt 120 NPF

**70 S 1** 70watt 120 NPF

**50 S 8** 50watt 120-277

**70 S 8** 70watt 120-277

##### LED

**12 L 1** 12watt 120

\*Note: 347 Volt is available in 50P6, 70P6 and 70S6

#### FINISH

**1** Dark Bronze

**2** Black

**3** Gray

**4** White

**5** Platinum

#### OPTIONS PHOTOCONTROL\*

**PC1** Button Photocontrol 120v

**PC2** Button Photocontrol 208v †

**PC3** Button Photocontrol 240v †

**PC4** Button Photocontrol 277v †

\*Not recommended at 70 watts

†For use on CFL and LED units only

#### EGRESS LAMP SOCKET

**EM** Mini can base socket only for remote power by others (Max 50watt recommended)

#### LAMP INCLUDED

**LP** Lamp shipped in carton with fixture Standard on LED units Fluorescent lamps are 3500k

#### ACCESSORIES

**LCC-SPC** Polycarbonate shield

**PBT-1\*** 120V button PC

**PBT-234\*** 208/240/277v button

**PTA-1** External 120Volt Photocontrol (use for 70watt)

**PTA-8** External 120-277Volt Photocontrol (use for 70watt)