


# UCL STARGATE™

## RETROTRIM SYSTEM

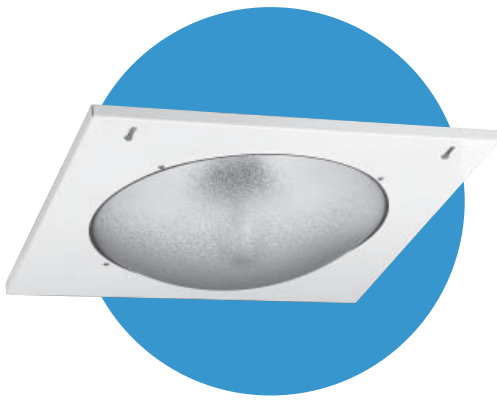

### Features

- Steel RetroTrim with White Lektrocote coat paint hinges to existing 2X2 surface mount luminaires.
- Insect-resistant, sealed sag glass optics with vertical lamp orientation for customer-attracting sparkle.
- Available in three sizes to retrofit popular 2X2 surface mount luminaires.
- Uses existing 400 watt ballast or converts to 320 or 250 watt Pulse Start technology.
- Completely assembled to optimize installation.
- Mogul base ED-28 lamp included.
- Damp location approved.



### Ordering Information

Catalog Number <sup>1</sup>	Wattage	Description
<b>Fits Whiteway Riviera II/Thunderbird</b>		
UCL-SG1-4C250P	250W Pulse Start	Converts Host 400 CWA to 250 PS
UCL-SG1-4C320P	320W Pulse Start	Converts Host 400 CWA to 320 PS
UCL-SG1-400	400 CWA Metal Halide	Uses Host 400 CWA Metal Halide Ballast (new Capacitor provided)
<b>Fits Whiteway Riviera I, LSI Masters &amp; Dakota Series</b>		
UCL-SG2-4C250P	250W Pulse Start	Converts Host 400 CWA to 250 PS
UCL-SG2-4C320P	320W Pulse Start	Converts Host 400 CWA to 320 PS
UCL-SG2-400	400 CWA Metal Halide	Uses Host 400 CWA Metal Halide Ballast (new Capacitor provided)
<b>Fits Jet Phillips</b>		
UCL-SG3-4C250P	250W Pulse Start	Converts Host 400 CWA to 250 PS
UCL-SG3-4C320P	320W Pulse Start	Converts Host 400 CWA to 320 PS
UCL-SG3-400	400 CWA Metal Halide	Uses Host 400 CWA Metal Halide Ballast (new Capacitor provided)

<sup>1</sup> Lamp included.

### Accessories - Order Separately

Catalog Number	Description
UCL-SG-HS	House Side Shield/Reflector: order one set for 180° shielding or two sets for 360° shielding
264-0395-9903	Replacement Drop Glass 17" diameter

### Stargate™ Retro Trim Selection

Series	For Housing Description
UCL-SG1 Series	Fixture size: 21 1/8" square; min. 6 3/8" above flange; flange opening range: 18 13/16" through 19 5/16"; Whiteway Riviera II/Thunderbird/Vision/LeSabre III; Cooper CLS
UCL-SG2 Series	Fixture size: 23" square; min. 6 3/8" above flange; flange opening range: 20 13/16" through 21 9/32"; LSI Master/Dakota; Jet Phillips Houstonian (old style); Whiteway Riviera I
UCL-SG3 Series	Fixture size: 21 3/4" square through 22" square; min. 6 3/8" above flange; flange opening range: 19 3/4" through 20 7/32"; Jet Phillips Houstonian SHO/RHO; Guardian MC-1411

Use the appropriate Stargate series with existing fixtures as shown below:

