

QSPC/TRPC/RDIC

Compact Architectural Wallpacks

- Complements larger Geometric wall sconce series – QSP, TRP, RDI
- Provides excellent illumination and uniformity
- Full cut-off, dark sky, neighbor friendly
- RDIC has removable internal panel allowing conversion to up/down output
- Durable die-cast aluminum construction
- Micro prism lens reduces glare on HID/CFL
- 70w Pulse Start Metal Halide and 42w Compact Fluorescent systems
- HID lamps are medium base
- Bronze and Platinum powder coat standard finishes (BOC and LED unit in Bronze only)
- NEW 13 LED, 23w, 1184 lumen, 5000K energy saving system, universal voltage 120-277V, 50/60Hz, available in QSPC
- LED has controlled optics with protective tempered glass outer lens for uniform distribution
- Lamps included
- Quick-mount adapter for easy installation on recessed J-boxes
- Listed to UL 1598 for use in wet locations



WALLPACKS

ORDERING INFORMATION


SERIES	WATTAGE/SOURCE/VOLTAGE	FINISH	OPTIONS
QSPC ⁴ Quarter Sphere Compact Wallpack	PULSE START METAL HALIDE 70P8 70w, Quad-Tap® CFL ¹ 42F8 ^{2,3} 42w, Quad-Tap® 42F9 ² 42w, 120/277V LED ^{2,4}	BZ Bronze PL Platinum	BOC ^{2,3} 0°C battery backup for CFL lamp provides 90 minutes backup power (must order 42F9)
TRPC Trapezoid Compact Wallpack			
RDIC Radius Compact Wallpack	13LU-5K 13 LEDs, 120-277V		

1 CFL lamp is 4-pin, 3500K

2 Available in Bronze finish only

3 BOC option only available in 42F9

4 LED option is only available in QSPC; 1184 lumens; 23.3 input watts; 5000K color temperature

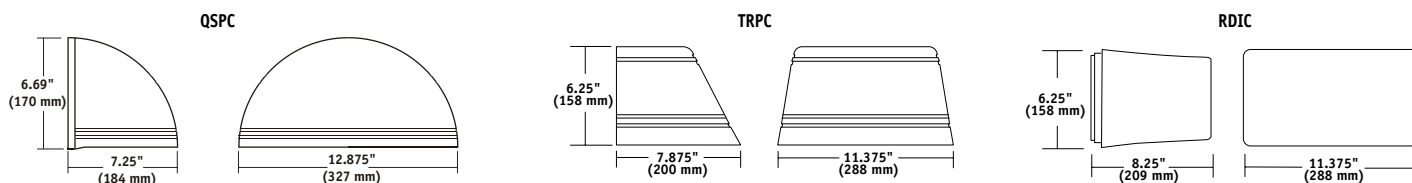

Outdoor Lighting