

PERIMALITER® WALLPACK

PGM3 GLASS SERIES

Cat. #		Approvals
Job	Type	




APPLICATIONS

- Perimeter lighting for safety and security. High performance with wide lateral spread.

SPECIFICATIONS

- Cast aluminum door frame with prismatic glass refractor. Door seals to housing gasket with twin Hubbell Gard® captive fasteners.
- Die cast aluminum housing allows firm mounting over recessed junction boxes or on flat surfaces for 1/2" surface conduit. Casting dissipates ballast heat for long life. Top hub supplied for field installation of button photo control, ordered separately.
- Specular aluminum reflector with kicker panels drive maximum lamp lumens to the refractor prisms. Vertical socket position with these optics provide six to one spacing to mounting height ratio for maximum spacing or better uniformity, greater lumens and lamp life.
- PGM features 70-250w HPS and pulse start metal halide. QuadTap®, 347V and 50Hz 220/240V available. Many listings include lamp for contractor convenience; see standard selections below.
- Dark bronze 800 Series powder paint finish standard on frame and housing. For optional finishes, black, gray, white and platinum consult factory.

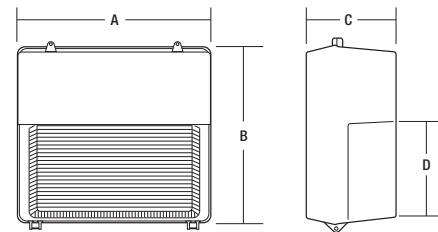

	A	B	C	D
PGM3	14 ⁷ / ₈ "	15"	8"	6 ¹³ / ₁₆ "
	378 mm	381 mm	203 mm	173 mm


LISTINGS

- CSA certified to UL 1598 for use in wet locations.



ORDERING INFORMATION

ORDERING EXAMPLE: PGM3-150P-18-BZ-EM-L



Catalog Number	Wattage	Source	Voltage	Ballast	Lamp Included	Weight	
						lbs.	kg
PULSE START METAL HALIDE							
PGM3-070P-18-BZ-L	70	PS	Quad Tap	HX-HPF	Yes	24	10.9
PGM3-100P-18-BZ-L	100	PS	Quad Tap	HX-HPF	Yes	25	11.3
PGM3-150P-18-BZ-L	150	PS	Quad Tap	HX-HPF	Yes	25	11.3
PGM3-250P-18-BZ-L	250	PS	Quad Tap	CWA-HPF	Yes	27	12.2
HIGH PRESSURE SODIUM							
PGM3-070S-18-BZ	70	HPS	Quad Tap	AL-HPF	No	23	10.4
PGM3-100S-18-BZ	100	HPS	Quad Tap	AL-HPF	No	24	10.9
PGM3-150S-18-BZ	150	HPS	Quad Tap	AL-HPF	No	25	11.3
PGM3-150S-18-BZ-L	150	HPS	Quad Tap	AL-HPF	Yes	25	11.3
PGM3-250S-18-BZ	250	HPS	Quad Tap	CWA-HPF	No	30	13.6
PGM3-250S-18-BZ-L	250	HPS	Quad Tap	CWA-HPF	Yes	33	14.9
LESS BALLAST							
PGM3-LB¹	250 Max	None	None	None	No	15	6.8

L Indicates lamp included with the fixture.
 Above units (-18) are Quad Tap (120,208,240,277V. 480V available on 150w units change 8 to 5.
 For TriTap Canadian ballast (120,277,347V) change 8 to 6.
 BZ - Dark Bronze finish is standard. For alternate finish - consult factory for price adder and availability
 Finishes available with adder: BL- Black, GR- Gray, WH- White, PS - Platinum
 50HZ ballastry is available - Consult factory
 BZ Replacement Lens/Door is 800 3399 0104
¹Socket is mogul base/finish is bronze

ACCESSORIES

(order as separate part #)

Catalog Number	Description
PBT-1	Photocontrol, 120V
PBT-234	Photocontrol, 208, 240, 277V
PG-PS¹	Polycarbonate Shield for refractor
PG-WG¹	Wire Guard for refractor
PVL3V	Full Cutoff Visor, formed aluminum, bronze finish

¹ Guard & shield can be used on the same fixture.

OPTIONS

(factory installed, add appropriate suffix)

Catalog Number	Description
-EM	Double Contact Socket for remote power (less lamp) all units
-QSS	Quartz Restrike System including relay (less lamp) all units (double contact bayonet socket)
-RS	Hot Restrike System, quickly restores main lamp output after power outage (HPS only), 150w maximum.
-L	Lamp included with fixture

PHOTOMETRIC REPORTS

Catalog Number	Report #
PGM-150S	HP07246.IES
PGM-250S	HP07358.IES
PGM3-100P	HP2383.IES
PGM3-250P With/PVL3V	HP2427.IES

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Outdoor Lighting

Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: www.hubbell-ltg.com